

ELECTRICAL OPTIONS/ SPECIFICATIONS

OUTPUT		SUPPLY (NOM.)	
'A' 0.5 - 4.5V RATIOMETRIC		5V	
SUPPLY CURRENT 12mA TYP. 20mA MAX.			
CONNECTIONS;	CABLE 3-CORE	CABLE 5-CORE	CONNECTOR
+Ve	RED	RED	:1
+ SENSE (5-WIRE ONLY)	-	ORANGE	:1
0V	BLACK	BLACK	:3
- SENSE (5-WIRE ONLY)	-	GREY	:3
OUTPUT	WHITE	WHITE	:2
BODY	SCREEN	SCREEN	:4


CABLE; 0.2mm², O/A SCREEN, PUR JACKET, SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm (15000cm MAX).  
STANDARD 3-CORE: BLACK Ø4mm JACKET e.g. L50  
OPTIONAL 5-CORE: BLUE Ø4.6mm JACKET e.g. LQ50  
CONNECTORS; MAXIMUM CONDUCTOR CROSS SECTION 0.25mm²

RANGE OF DISPLACEMENT FROM 0-2mm TO 0-350mm  
IN INCREMENTS OF 1mm e.g.36.  
BODY MATERIAL:- STAINLESS STEEL.


FURTHER OPTIONS:  
SINGLE PAIR OF BODY CLAMPS (CODE 'P')  
TWO PAIRS OF BODY CLAMPS (CODE 'P2')  
SPRING RETURN PUSH-ROD, TRAVEL ≤ 300mm  
RETURN TO EXTENDED POSITION (CODE 'R')  
RETURN TO RETRACTED POSITION (CODE 'S')

DOME END\* (CODE 'T') IN CONJUNCTION WITH SPRUNG PUSH-ROD (CODE 'R')  
PUSH-ROD FREE (CODE 'V') N.b. NOT AVAILABLE WITH SPRUNG OPTION.  
MAGNETIC TIP (CODE 'WA')

NOTE: ROD-EYE ORIENTATION RELATIVE TO GLAND/CONNECTOR NOT GUARANTEED.  
THE PUSH-ROD RETRACTS AND EXTENDS 2mm NOM. AT EITHER END OF CALIBRATED TRAVEL.  
'V' CODED PUSH-ROD WILL DEPART SENSOR BODY

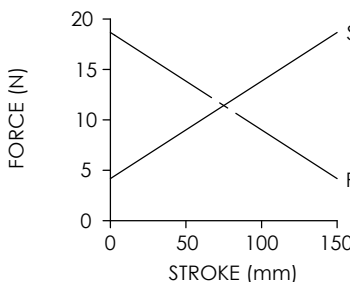

SPRING FORCE VS STROKE  
(CODE 'R' OR 'S' <150mm STROKE)



SPRING FORCE VS STROKE  
(CODE 'R' OR 'S' >150mm STROKE)

DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.  
CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED BY THE AUTHORISED PERSON.  
THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

REV	CHANGE HISTORY	DR'WN	DATE	CHK'D
G	ADD SPRING/RAD ENDCAP/MAGTIP/AMEND MARKS RAN1425	ASC	31/05/2023	ASC


NOTE:- READ INSTALLATION SHEET H000-19  
FOR FULL INSTRUCTIONS FOR USE.

**CSA APPROVED TO**  
**Class I Zone 0**  
**Ex/AEx ia IIC T4 (Ta= -40 to 80°C)**  
**AEx ia D IIIC T93°C(Ta= -40 to 80°C)**  
**Ui 11.4V, Ii 0.2A, Pi 0.51W**

APPROVED FOR USE IN CONJUNCTION  
WITH A GALVANICALLY ISOLATED BARRIER.

NOTE: APPROVAL ONLY APPLIES AT NORMAL  
ATMOSPHERIC PRESSURE!



APPROVED BY  RDM	REV  G		X ±0.4 X.X ±0.2 X.XX ±0.1 DIMS mm
DESCRIPTION H117 INTRINSICALLY SAFE SLIM LINE LINEAR POSITION SENSOR			
SCALE  A3	DRAWING NUMBER  H117-11		
SHEET 1 OF 1			



# H117 SLIM-LINE LINEAR POSITION SENSOR

## INTRINSICALLY SAFE FOR HAZARDOUS DUST ATMOSPHERES

- **Intrinsically safe for Gas and Dust to: Class I, Zone 0 Ex ia / AEx ia**
- **Non-contacting inductive technology to eliminate wear**
- **Travel set to customer's requirement**
- **Compact 19 mm diameter body,**
- **High accuracy and stability**
- **Sealing to IP67**



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications. Our H117 incorporates electronics system EX06 which is CSA approved for use in potentially explosive **gas/vapour and dust** atmospheres.

The H117 is designed for industrial and scientific feedback applications and is ideal for OEMs seeking good sensor performance for arduous applications in hazardous areas.

Overall performance, repeatability and stability are outstanding over a wide temperature range. The unit is very compact and space-efficient with a small 19mm diameter body. The sensor is very robust, the body and push rod being made of stainless steel. The sensor is easy to install with mounting options including M5 male stud and M5 rod eye bearing. The push rod can be supplied free or captive, with male M5 thread, M5 rod eye or magnetic tip. 1/4" rod eye option available. Like all Positek® sensors, the H117 provides a linear output proportional to travel. Each unit is supplied with the output calibrated to the travel required by the customer, from 5 to 350mm and with full EMC protection built in. The H117 offers a range of mechanical options, environmental sealing is to IP67.

### SPECIFICATION

#### Dimensions

Body diameter	19 mm
Body Length	
(Axial version)	calibrated travel + 109.7 mm
(Radial version)	calibrated travel + 118.5 mm

For full mechanical details see drawing H117-11

#### Power Supply

+5V dc nom.  $\pm 0.5V$ , 10mA typ 20mA max

#### Output Signal

0.5-4.5V dc ratiometric, Load: 5k $\Omega$  min.

#### Independent Linearity

$\leq \pm 0.25\%$  FSO @ 20°C

$\leq \pm 0.1\%$  FSO @ 20°C\* available upon request.

\*Sensors with calibrated travel of 10 mm and above.

#### Temperature Coefficients

$< \pm 0.01\%/^{\circ}C$  Gain &

$< \pm 0.01\%FS/^{\circ}C$  Offset

$> 10$  kHz (-3dB)

#### Frequency Response

#### Resolution

Infinite

#### Noise

$< 0.02\%$  FSO

#### Intrinsic Safety

Class I Zone 0

Ex ia IIC T4 (Ta = -40°C to +80°C)

AEx ia IIC T4 (Ta = -40°C to +80°C)

AEx ia D IIIC T93°C (Ta = -40°C to +80°C)

Approval only applies to the specified ambient temperature range and atmospheric conditions in the range 0.80 to 1.10 Bar, oxygen  $\leq 21\%$

#### Sensor Input Parameters

Ui: 11.4V, Ii: 0.20A, Pi: 0.51W.

#### (connector option/s)

CI: 1.16 $\mu$ F, Li: 50 $\mu$ H

#### (cable option/s)

CI: 1.36 $\mu$ F, Li: 710 $\mu$ H with 1km max. cable

#### Environmental Temperature Limits

##### Operating

-40°C to +80°C

##### Storage

-40°C to +125°C

#### Sealing

IP67

#### EMC Performance

EN 61000-6-2, EN 61000-6-3

#### Vibration

IEC 68-2-6: 10 g

#### Shock

IEC 68-2-29: 40 g

#### MTBF

350,000 hrs 40°C Gf

#### Drawing List

H117-11

Sensor Outline

Drawings, in AutoCAD® dwg or dxf format, available on request.

**Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.**



# H117 SLIM-LINE LINEAR POSITION SENSOR

## INTRINSICALLY SAFE FOR HAZARDOUS DUST ATMOSPHERES

Intrinsically safe equipment is defined as "equipment which is incapable of releasing sufficient electrical or thermal energy under normal or abnormal conditions to cause ignition of a specific hazardous atmosphere mixture in its most easily ignited concentration."

CSA approved to;

Class I, Zone 0

Ex ia IIC T4 (Ta = -40°C to +80°C)

AEx ia IIC T4 (Ta = -40°C to +80°C)

AEx ia D IIIC T93°C (Ta = -40°C to +80°C)

Designates the sensor as belonging to; Class I, Zone 0: can be used in areas with continuous, long or frequent periods of exposure to hazardous gas or dust.

Gas:

Protection class ia IIC, denotes intrinsically safe for Zones 0, 1 & 2 and IIA, IIB and IIC explosive gases.

Temperature class T4: maximum sensor surface temperature under fault conditions 135°C.

Dust:

T93°C: maximum sensor surface temperature under fault conditions 93°C.

Ambient temperature range extended to -40°C to +80°C.

It is imperative Positek® intrinsically safe sensors be used in conjunction with a galvanic barrier to meet the requirements of the product certification. The Positek G005 Galvanic Isolation Amplifier is purpose made for Positek IS sensors making it the perfect choice. Refer to the G005 datasheet for product specification and output configuration options.

### Safety Parameters:-

Ui: 11.4V, Ii: 0.20A, Pi: 0.51W

Ci = 1.36µF\* Li = 710µH\* (cable option/s)

Ci = 1.16µF Li = 50µH (connector option/s)

\*Figures for 1km cable where: Ci = 200pF/m & Li = 660nH/m

Sensors can be installed with a maximum of 1000m of cable.

Cable characteristics must not exceed:-

Capacitance: ≤ 200 pF/m for max. total of: 200 nF.

Inductance: ≤ 660 nH/m for max. total of: 660 µH

For cable lengths exceeding 10 metres a five wire connection is recommended to eliminate errors introduced by cable resistance and associated temperature coefficients.

CSA approved sensors suitable for gas (G series) applications, are also available from Positek.

## TABLE OF OPTIONS

**CALIBRATED TRAVEL:** Factory set to any length from 0-5mm to 0-350mm (e.g. 76mm).

### ELECTRICAL INTERFACE OPTIONS

The Positek® G005 Galvanic Isolation Amplifier is available with the following output options;

Standard: 0.5 - 9.5V or 4 - 20mA.

Reverse: 9.5 - 0.5V or 20 - 4mA.

### CONNECTOR/CABLE OPTIONS

Connector - Binder 713 series

Axial or Radial, IP67

Cable† with Pg 9 gland

Axial, IP67

†Three core (black jacket) or five core (blue jacket) cable options available.

Cable length >50 cm – please specify length in cm up to 15000 cm max.


We recommend all customers refer to the 3 or 5-Wire Mode Connection page.

### MOUNTING OPTIONS

M5 rod eye bearing or M5x0.8 male thread (radial versions), Body Tube Clamp/s (axial or radial versions). 1/4" rod eye option available.

**PUSH ROD OPTIONS** – Retained† or Free with M5x0.8 male thread, M5 rod eye bearing or Magnetic tip.

† standard, retained with male thread.

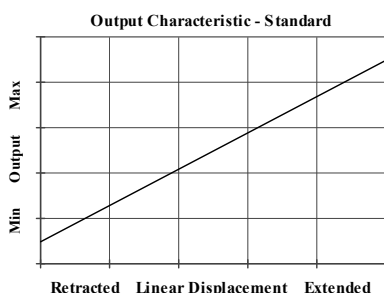

For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

H117-17g

2 of 3



# Three or Five-Wire Mode Connection

## FOR INTRINSICALLY SAFE SENSORS IN HAZARDOUS ATMOSPHERES

The aim of this document is to help readers who do not understand what is meant by three or five wire modes of connection between the galvanic isolation amplifier and sensor, and the factors behind them. It is by no means an in-depth technical analysis of the subject.

Whether opting for a pre-wired Positek® Intrinsically Safe sensor or one with a connector, choosing the right mode of connection and cable to suit the application requires careful consideration.

Interconnecting cables are not perfect conductors and offer resistance to current flow, the magnitude of resistance<sup>†</sup> depends on conductors resistivity, which changes with temperature, cross sectional area<sup>‡</sup> and length. If the voltage were to be measured at both ends of a length of wire it would be found they are different, this is known as volts drop. Volts drop changes with current flow and can be calculated using Ohm's law, it should be noted that volts drop occurs in both positive and negative conductors. The effects of volts drop can be reduced by increasing the conductors cross sectional area, this does not however eliminate the effects due to temperature variation. There are instances where large cross-section cables are not practical; for example most standard industrial connectors of the type used for sensors have a maximum conductor capacity of 0.75mm<sup>2</sup>, copper prices and ease of installation are other considerations.


This is important because the effects of volts drop can significantly alter the perceived accuracy of the sensor which is ratiometric i.e. the output signal is directly affected by the voltage across the sensor. Changes in temperature will also be seen as gain variation in the sensor output.

**Three wire mode** connections are common and are suitable in most cases with short or moderate cable runs. Applications that do not require a high degree of accuracy but have cable runs, say in excess of 10m, volts drop can be reduced by introducing a terminal box close to the sensor and using a larger cross-section cable for a majority of the cable run. Sensors supplied with three core cable are calibrated with the cable fitted which largely eliminates errors due to conductor resistance at room temperature however, as mentioned above, small gain errors due to temperature fluctuations should be expected.

**Five wire mode** connections have significant benefits as losses in the positive and negative conductors are compensated for by the galvanic isolation amplifier which can 'sense' the voltage across the sensor and dynamically adjust the output voltage so that the voltage across the sensor is correct. The effects of cable resistance and associated temperature coefficients are eliminated allowing for smaller conductors than a three wire connection for the same cable run. The amplifier can compensate for up to 15Ω per conductor with a current flow of 15mA, which is more than adequate for 150m of 0.25 mm<sup>2</sup> cable, longer lengths will require larger conductors.

**For this reason Positek® recommends five wire connections for cable lengths exceeding 10 metres in 0.25 mm<sup>2</sup> cable to preserve the full accuracy of the sensor.**

See illustrations below for examples of connecting a sensor to the galvanic isolation amplifier.

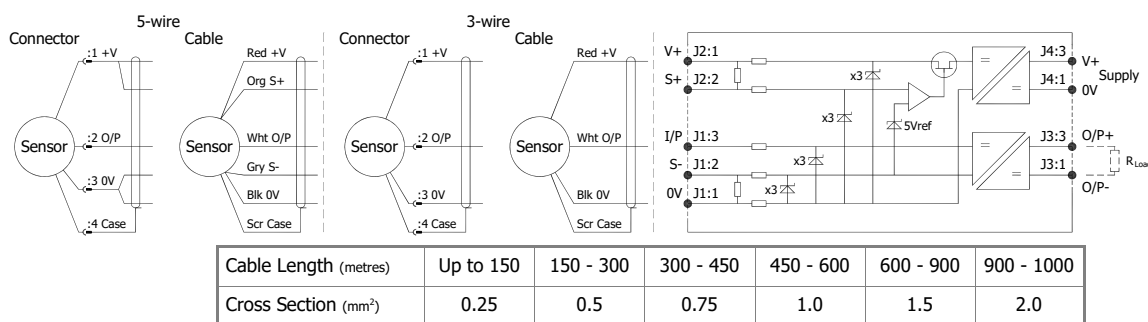

The table above shows recommended conductor sizes with respect to cable length for both three and five wire connections, based on copper conductors. Three wire connections will introduce a gain reduction of 5% and a ±1% temperature dependence of gain over the range -40°C to +80°C for the cable temperature. (i.e. about -150 ppm/°C for the maximum lengths shown and less pro rata for shorter lengths.)

It should be noted that the maximum cable length, as specified in the sensor certification, takes **precedence** and **must not** be exceeded.

Positek® sensors are supplied with three core 0.25 mm<sup>2</sup> cable as standard, however five core 0.25 mm<sup>2</sup> cable can be supplied on request. The galvanic isolation amplifier is available as;

G005-\*\*\* for 'G' and 'H' prefix sensors  
X005-\*\*\* for 'E', 'M' and 'X' prefix sensors

<sup>†</sup>  $R = \rho L / A$   $\rho$  is the resistivity of the conductor (Ωm)  $L$  is the length of conductor (m)  $A$  is the conductor cross-sectional area (m<sup>2</sup>).

<sup>‡</sup> It is presumed that direct current flow is uniform across the cross-section of the wire, the galvanic isolation amplifier and sensor are a dc system.

# Intrinsically Safe - Dust Atmospheres

## H117 Slim-Line Linear Position Sensor

	a	b	c	d	e	f	g	h
H117	Displacement	A	Connections	Option	Option	Option	Option	Z-code

a Displacement (mm)		Value
Displacement in mm	e.g. 0 - 254 mm	<b>254</b>
b Output		
Supply V dc V <sub>s</sub> (tolerance)	Output	Code
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)	<b>A</b>
c Connections Cable or Connector		Code
Cable Gland - Radial	IP67 metal - 3-core cable	<b>IAxx</b>
	IP67 metal - 5-core cable	<b>IAQxx</b>
	IP67 metal - 3-core cable	<b>IBxx</b>
	IP67 metal - 5-core cable	<b>IBQxx</b>
Connector - Axial	IP67 M12 IEC 60176-2-101 metal	<b>J</b>
	pre-wired - 3-core cable	<b>Jxx</b>
	pre-wired - 5-core cable	<b>JQxx</b>
	IP67 M12 IEC 60176-2-101 metal	<b>K</b>
Connector - Radial	pre-wired - 3-core cable	<b>Kxx</b>
	pre-wired - 5-core cable	<b>KQxx</b>
	IP67 M8 IEC 60176-2-104 metal	<b>KA</b>
	pre-wired - 3-core cable	<b>KAxx</b>
Cable Gland - Axial	IP67 metal - 3-core cable	<b>Lxx</b>
	IP67 metal - 5-core cable	<b>LQxx</b>
Specify required cable length 'xx' in cm. e.g. L2000 specifies cable gland with 20 m of cable, 50 cm supplied as standard. <b>N.b.!</b> M8 connector option with 5-core cable not available.		
d Body Fittings		Code
None - default	Male Thread M5x0.8x10 long - Radial body style only.	blank
M5 Rod-eye Bearing	Radial body style only	<b>N</b>
e Body Clamps		Code
None - default		blank
Body Clamps - 1 pair		<b>P</b>
f Push Rod Fittings		Code
None - default	Male Thread M5x0.8x10 long	blank
M5 Rod-eye Bearing		<b>U</b>
Magnetic Tip		<b>WA</b>
g Push Rod Options		Code
Captive - default	Push rod is retained	blank
Non-captive	Push rod can depart body	<b>V</b>
h Z-code		Code
Calibration to suit G005 - Default		<b>Z000</b>
≤± 0.1% @20°C Independent Linearity displacement between 10mm & 400mm only!		<b>Z650</b>
1/4" Rod eye options available		<b>Z827</b>

Note!

All Intrinsically Safe (IS) sensors must have a Z-code suffix.

IS sensors must be used in conjunction with a Galvanic Isolation Amplifier - See G005 for Output options.



# Generic Installation Information

## H SERIES SENSORS

### INTRINSICALLY SAFE FOR HAZARDOUS GAS/VAPOUR & DUST ATMOSPHERES

CSA Qualified Intrinsically Safe Device Certificate number 13.2588225			Class I, Zone 0 Ex ia IIC T4 (Ta = -40°C to +80°C) AEx ia IIC T4 / Ex ia IIC T4 (Ta = -40°C to +80°C) AEx ia D IIC T93°C (Ta = -40°C to +80°C)
Electronics Option	Output Description:	Supply Voltage: V <sub>s</sub> (tolerance)	Load resistance:
A	0.5 - 4.5V (ratiometric with supply)	+5V (4.5 - 5.5V)	5kΩ min

#### Connector Pin Layout:

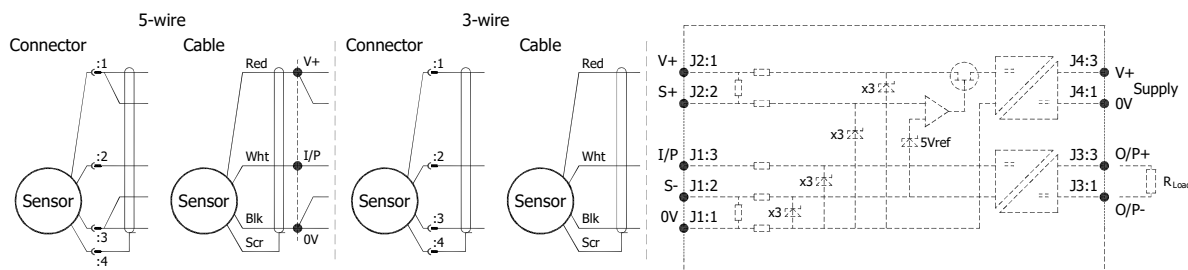

#### Putting Into Service:

The sensor must be used with a galvanic isolation barrier designed to supply the sensor with a nominal 5V and to transmit the sensor output to a safe area. The barrier parameters must not exceed:-

$$\begin{aligned}
 U_i &= 11.4V & I_i &= 0.20A & P_i &= 0.51W \\
 C_i &= 1.36\mu F^* & L_i &= 710\mu H^* & & \text{(with maximum length integral cable)} \\
 C_i &= 1.16\mu F & L_i &= 50\mu H & & \text{(without integral cable)}
 \end{aligned}$$

\*Figures for 1km cable where:  $C_i = 200\text{pF/m}$  &  $L_i = 660\text{nH/m}$

The sensor is certified to be used with up to **1000m** of cable, cable characteristics must not exceed:-

Capacitance:  $\leq 200\text{ pF/m}$  for max. total of:  $200\text{ nF}$   
 Inductance:  $\leq 660\text{ nH/m}$  for max. total of:  $660\text{ }\mu\text{H}$

#### Use:

The sensor is designed to measure Linear or rotary displacement and provide an analogue output signal.

#### Assembly and Dismantling:

The unit is not to be serviced or dismantled and re-assembled by the user.

WARNING: Substitution of components may impair intrinsic safety

AVERTISSEMENT: La substitution de composants peut altérer la sécurité intrinsèque

#### Maintenance:

Accumulated dust layer must not exceed a depth of 50mm.

Issue A

For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615


Positek Ltd, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.



# Installation Information

## H117 SLIM-LINE LINEAR POSITION SENSOR

### INTRINSICALLY SAFE FOR HAZARDOUS DUST ATMOSPHERES

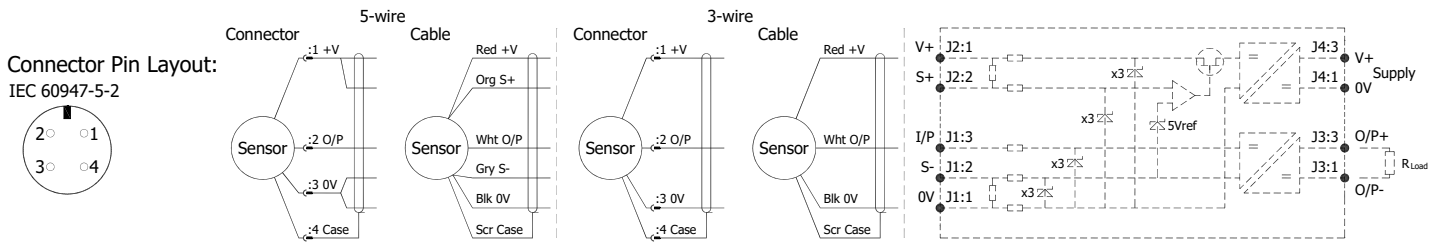

Approval only applies to specified ambient temperature range and atmospheric conditions in the range: 0.80 to 1.10 Bar, oxygen  $\leq$  21%.

#### The H117 is available with the following connections:-

IP67	IEC 60947-5-2 Connector	Axial or Radial	Options 'J' or 'K'
IP67	Cable gland with cable	Axial	Options 'Lxx' or 'LQxx'
IP67	Cable with boot	Radial	Options 'Ixx' or 'IQxx'

The performance of the sensor may be affected by voltage drops associated with long cable lengths; For cable lengths exceeding 10 metres a five wire connection is recommended to eliminate errors introduced by cable resistance and associated temperature coefficients.

Cable Up to 150m of 0.2 mm<sup>2</sup>, screened, PUR jacket; 3 core cable 4 mm dia. black,  
5 core cable 4.6 mm dia. Blue.


N.b. sensors supplied with cable, the free end must be appropriately terminated.

**Warning** - The M12 IEC 60947 connector may be rotated for purposes of convenient orientation of the connector and cable, however rotating the connector more than one complete revolution is not recommended.

**Repeated rotation of the connector will damage the internal wiring!**

**Mechanical Mounting:** Depending on options; Body can be mounted by M5x0.8 male thread, M5 rod eye (1/4" rod eye option available) or by clamping the sensor body - body clamps are available, if not already ordered. Target by M5x0.8 female thread, M5 rod eye or magnetic tip. It is assumed that the sensor and target mounting points share a common earth.

**Output Characteristic:** Target is extended 2 mm from end of body at start of normal travel. The output increases as the target extends from the sensor body, the calibrated stroke is between 5 mm and 350 mm.

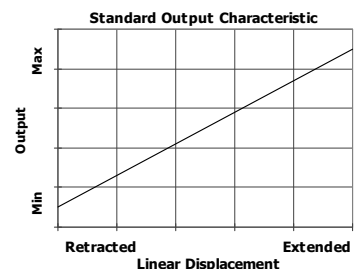

**Incorrect Connection Protection levels: Not protected** – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.