

TR series

Subminiature washable rocker switches



DISTINCTIVE FEATURES

- Process sealed
- Single piece case
- Front and rear sealing
- Wide variety of contact materials
- Same PCB layout as TL, TP and TG subminiature switches



ENVIRONMENTAL SPECIFICATIONS

- Operating temperature : -30 °C to +85 °C (-22 °F to +185 °F)
- Moisture : 21 days 95 % (NFC 20-603 - IEC 68-2-3)



ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
 - gold plated contacts : 0.4 VA 20 V max. AC or DC
 - silver plated contacts : 0.5 A 48 V max. AC or DC
- Minimum load : 10 mA 50 mV - 10 µA 5 VDC
- Contact resistance : 20 mΩ max.
- Insulation resistance : 1,000 MΩ min. at 500 VDC
- Dielectric strength :
 - 1,000 Vrms 50 Hz min. between terminals and frame
 - 500 Vrms 50 Hz min. between terminals
- Electrical life at full load :


Contacts	Number of cycles	
	2 positions	3 positions
Gold plated	60,000	30,000
Silver plated	20,000	10,000



GENERAL SPECIFICATIONS

- Strength of terminals : pull-out force - 10 N max
- Cleaning : solvents or water + detergent
- Wave soldering : 260 °C (500 °F) - 5 sec.

The company reserves the right to change specifications without notice.

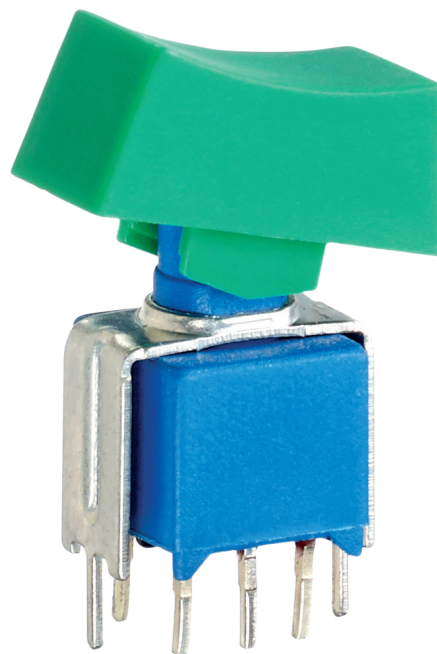

TR series

Subminiature washable rocker switches




MATERIALS

- Case : PBT
- Actuator : polyamide
- Contacts and terminals :
 - 0 : brass, gold plated
 - 1 : brass, silver plated
 - 3 : brass, gold plated (1.27 micron)
 - 8 : contact brass, gold plated + tin plated terminals
 - 9 : contact brass, gold plated (1.27 micron) + tin plated terminals
- Terminal seal : epoxy


APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.




TERMINALS




ELECTRICAL FUNCTIONS



PANEL CUT-OUT




With small rocker



With large rocker



PCB MOUNTING

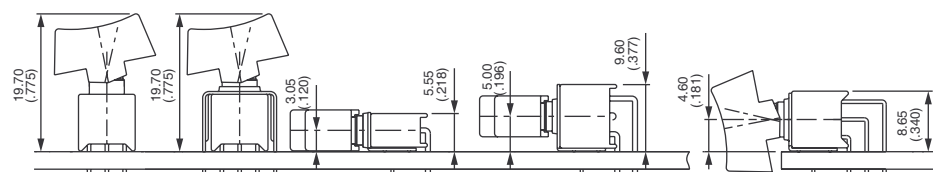


TR series

Subminiature washable rocker switches



BUILD YOUR PART NUMBER

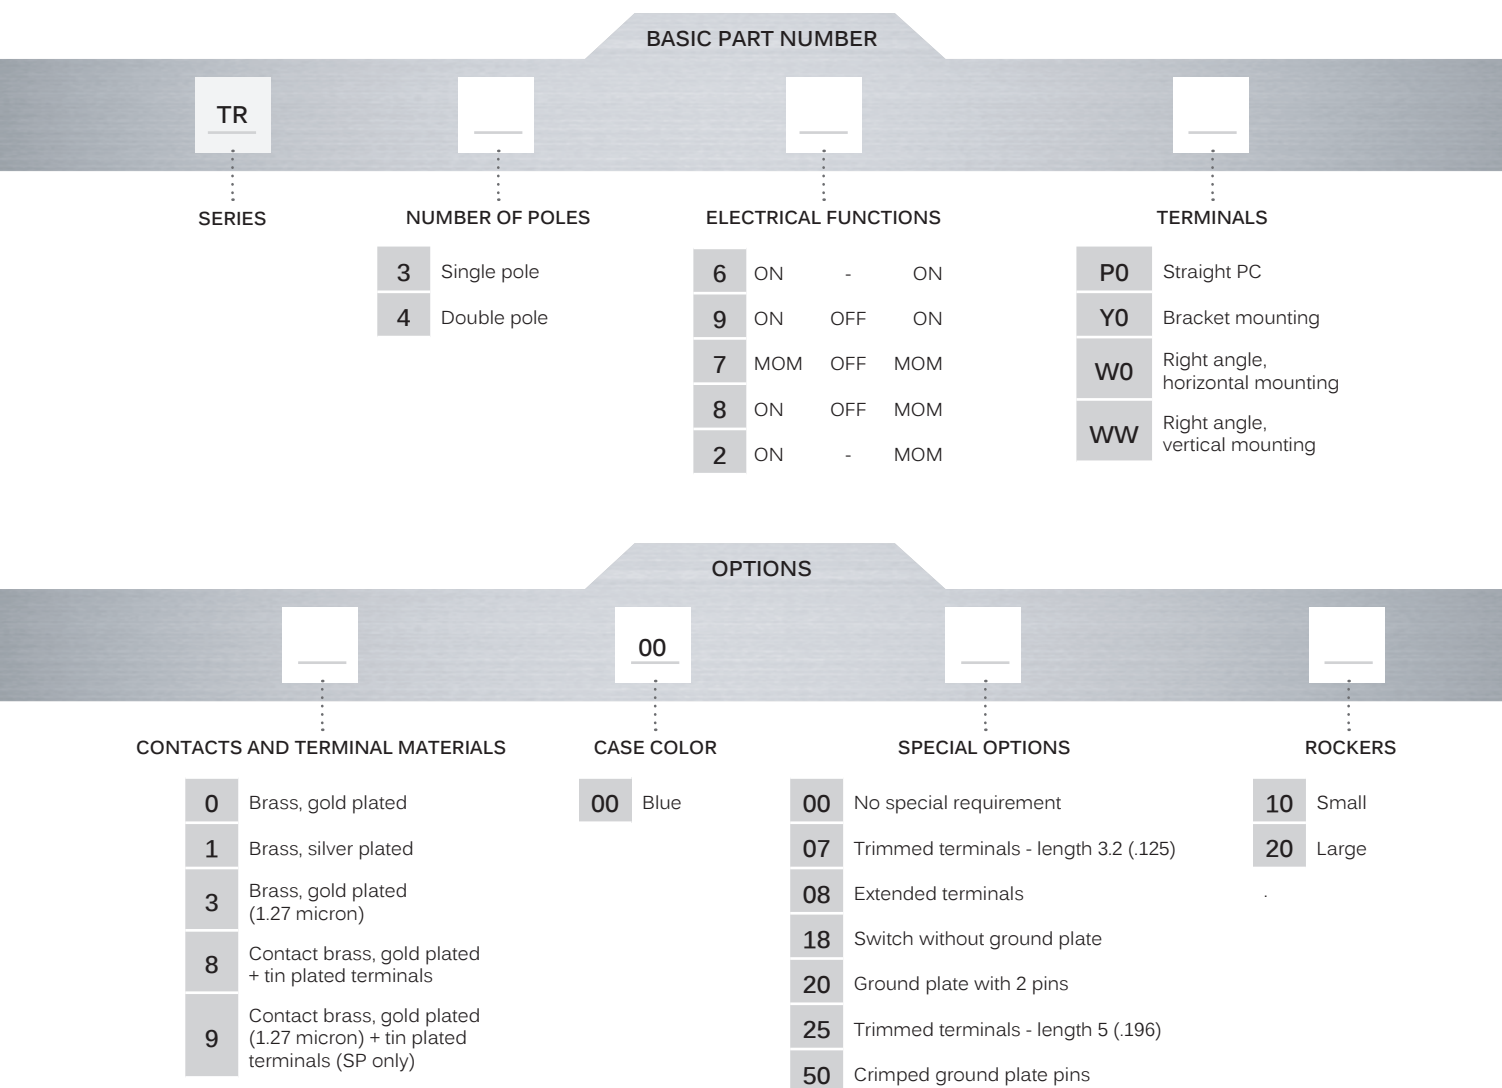

ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.



Notice : please note that not all combinations of above numbers are available. Refer to the following pages for further information.


TR series

Subminiature washable rocker switches

STRAIGHT PC TERMINALS : TR..P0




	Single pole	Double pole	III	II	I
	TR36P0	TR46P0	ON	-	ON
	TR39P0	TR49P0	ON	OFF	ON
	TR37P0	TR47P0	MOM	OFF	MOM
	TR38P0	TR48P0	ON	OFF	MOM
	TR32P0	TR42P0	ON	-	MOM

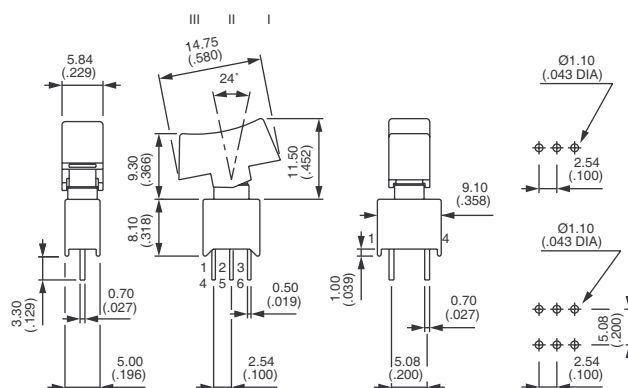

STRAIGHT TERMINALS BRACKET MOUNTING : TR..Y0




	Single pole	Double pole	III	II	I
	TR36Y0	TR46Y0	ON	-	ON
	TR39Y0	TR49Y0	ON	OFF	ON
	TR37Y0	TR47Y0	MOM	OFF	MOM
	TR38Y0	TR48Y0	ON	OFF	MOM
	TR32Y0	TR42Y0	ON	-	MOM

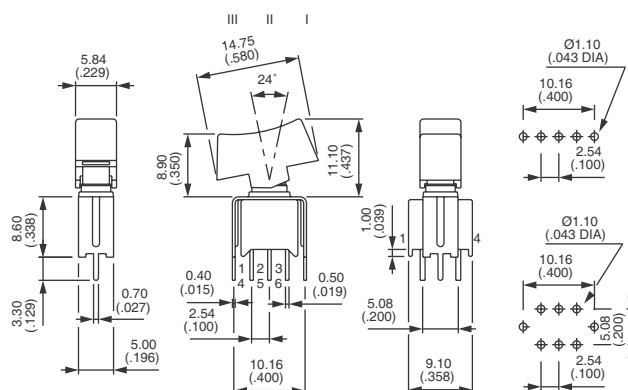

RIGHT ANGLE TERMINALS HORIZONTAL MOUNTING : TR..W0




	Single pole	Double pole	III	II	I
	TR36W0	TR46W0	ON	-	ON
	TR39W0	TR49W0	ON	OFF	ON
	TR37W0	TR47W0	MOM	OFF	MOM
	TR38W0	TR48W0	ON	OFF	MOM
	TR32W0	TR42W0	ON	-	MOM

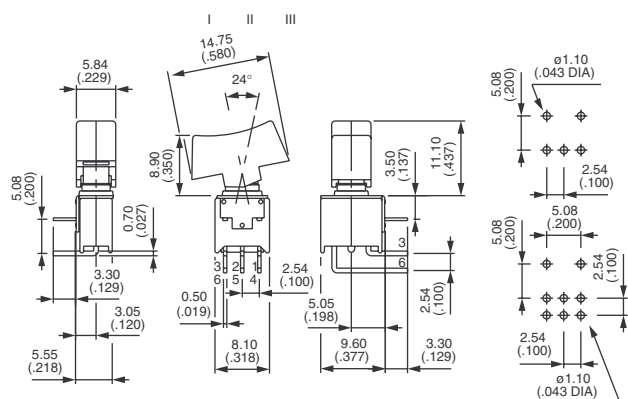

RIGHT ANGLE TERMINALS VERTICAL MOUNTING : TR..WW




	Single pole	Double pole	III	II	I
	TR36WW	TR46WW	ON	-	ON
	TR39WW	TR49WW	ON	OFF	ON
	TR37WW	TR47WW	MOM	OFF	MOM
	TR38WW*	TR48WW*	ON	OFF	MOM
	TR32WW*	TR42WW*	ON	-	MOM

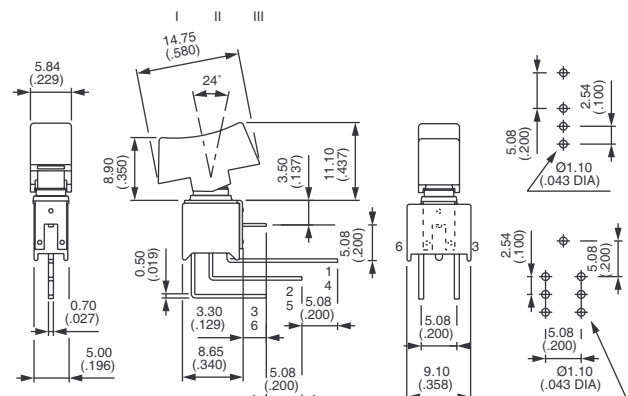


*Functions 2 and 8 : reversed connection available . Consult factory.

CONTACT AND TERMINAL MATERIALS



- 0 Brass, gold plated
- 1 Brass, silver plated
- 3 Brass, gold plated (1.27 micron)
- 8 Contact brass, gold plated + tin plated terminals
- 9 Contact brass, gold plated (1.27 micron) + tin plated terminals (single pole only)

CASE COLOR




- 00 Blue

SPECIAL OPTIONS



- 00 No special requirement
- 07 **Trimmed terminals** - length 3.2 mm (.125) for TR..WW models only
- 08 **Extended terminals** for TR..W0 models only
- 18 Switch **without ground plate** for TR..WW models only
- 20 **Ground plate with 2 pins** for TR..WW models only
- 25 **Trimmed terminals** - length 5 mm (.196) for all models, except TR..WW
- 50 **Crimping of ground plate pins.**
Retains switch on PC during handling and wave soldering.
For models TR..W0, TR..WW and TR..Y0 single and double pole.

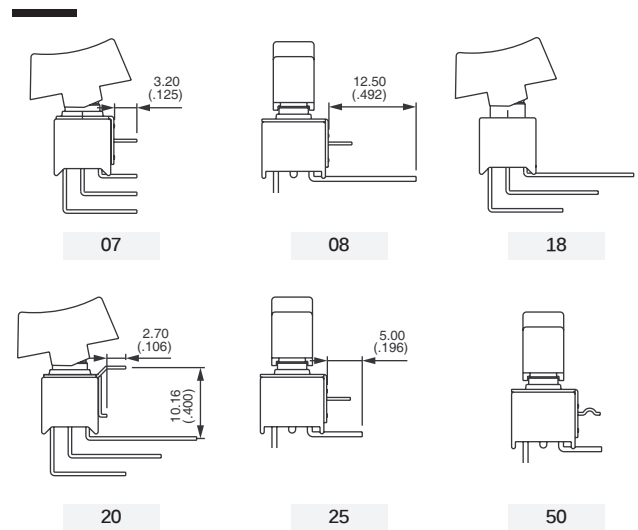

Marking on rocker : consult factory.

TR series

Subminiature washable rocker switches


ROCKERS

BASIC P/N


- 10 Small
20 Large

For cap colors, replace "0" by number :

- 1 Blue
1/4 Dark blue
2 Black
3 Green
4 Grey
5 Yellow
6 Red
7 Ivory
7/1 White
9 Orange



10



20