



H	19/10/06		CHECKED BY	X	±0.4
I	15/01/09		RDS	X.X	±0.2
J	06/07/11			X.XX	±0.1
				DIMS	mm
K	11/09/17			DESCRIPTION	
		P501 RIPS MINIATURE			
		ROTARY SENSOR			
SCALE		DRAWING NUMBER	P501-11	REV	K
10mm 					
		SHEET 1 OF 1			



P501 MINIATURE ROTARY SENSOR

High-resolution angle feedback for industrial and scientific applications

- **Non-contacting inductive technology to eliminate wear**
- **Angle set to customer's requirement**
- **Compact, durable and reliable**
- **High accuracy and stability**
- **Sealing to IP67**



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications.

Our P501 is an affordable, durable, high-accuracy rotary sensor designed for industrial and scientific feedback applications, but requires a smaller footprint than the P500.

Like all Positek® sensors, the P501 provides a linear output proportional with input shaft rotation. Each unit is supplied with the output calibrated to the angle required by the customer, between 30 and 140 degrees and with full EMC protection built in.

It is particularly suitable for OEMs seeking good sensor performance for applications where space is important.

Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor has a rugged nickel plated aluminium body and integrated mounting flange. The flange has two 4.3mm by 20 degree wide slots on a 48mm pitch to simplify mounting and position adjustment. Environmental sealing is to IP67 on the cable version.

SPECIFICATION

Dimensions

Body diameter	28.3 mm (solder pins) 30.8 mm (with cable boot)
Body Length (to seal face)	23.2 mm
Shaft	8.5 mm Ø 4 mm

For full mechanical details see drawing P501-11

Power Supply	+5V dc nom. $\pm 0.5V$, 10mA typ 20mA max
Output Signal	0.5-4.5V dc ratiometric, Load: 5k Ω min.
Independent Linearity	$\leq \pm 0.31\%$ FSO @ 20°C - up to 80° $\leq \pm 0.1\%$ FSO @ 20°C* available upon request.

*Sensors with calibrated travel up to 80°.

Temperature Coefficients	$< \pm 0.01\%/^{\circ}C$ Gain & $< \pm 0.01\%FS/^{\circ}C$ Offset
Frequency response	> 10 kHz (-3dB)

Resolution	Infinite
Noise	$< 0.02\%$ FSO
Torque	< 20 mNm Static

Environmental Temperature Limits

Operating	-40°C to +125°C
Storage	-40°C to +125°C

Sealing

IP67

EMC Performance

EN 61000-6-2, EN 61000-6-3

Vibration

IEC 68-2-6: 10 g

Shock

IEC 68-2-29: 40 g

MTBF

350,000 hrs 40°C Gr

Drawing List

P501-11 Sensor Outline

Drawings, in AutoCAD® dwg or dxf format, available on request.

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

P501-17w



P501 MINIATURE ROTARY SENSOR

High-resolution angle feedback for industrial and scientific applications

How Positek's technology eliminates wear for longer life

Positek's Inductive technology is a major advance in displacement sensor design. Our displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT.

Our technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A Positek sensor, based on simple inductive coils using Positek's ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life.

Our technology overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials. It requires no separate signal conditioning.

We also offer a range of ATEX-qualified intrinsically-safe sensors.

TABLE OF OPTIONS

CALIBRATED TRAVEL: Factory-set to any angle from $\pm 15^\circ$ to $\pm 70^\circ$ in increments of 1 degree.

Full 360° Mechanical rotation.

ELECTRICAL INTERFACE

OUTPUT SIGNAL SUPPLY INPUT
0.5-4.5V dc ratiometric +5V dc nom. $\pm 0.5V$.



OUTPUT LOAD
5k Ω min.

CONNECTOR/CABLE OPTIONS

Solder pins
Cable with boot IP67
Cable length >50 cm – please specify length in cm

MOUNTING OPTIONS

Plain 4 mm diameter shaft with flat or tongue with spring clip .



For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615
Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

P501-17w

P501 Miniature Rotary Sensor


	a	b	c	d	e	f
P501	Displacement	A	Connections	Option	Option	Z-code

a Displacement (degrees)		Value
Displacement in degrees	e.g. 0 - 54 degrees	54
b Output		
Supply V dc V _s (tolerance)	Output	Code
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)	A
c Connections		Code
Solder Pins	requires option 'U'	L0
Cable	requires option 'T'	Lxx
Specify required cable length 'xx' in cm. e.g. L2000 specifies cable gland with 20 m of cable, 50 cm supplied as standard.		
d Shaft Option		Code
Plain Shaft		N
Sprung Blade		P
e Housing Options		Code
Heatshink Boot	IP67 requires option 'Lxx'	T
None	requires option 'L0'	U
f Z-code		Code
≤± 0.1% @20°C Independent Linearity displacement up to 80 degrees only!		Z650

Installation Information

P501 MINIATURE ROTARY SENSOR


Output Option	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance: (include leads for 4 to 20mA O/Ps)
A	0.5 - 4.5V (ratiometric with supply)	+5V (4.5 - 5.5V)	$\geq 5k\Omega$

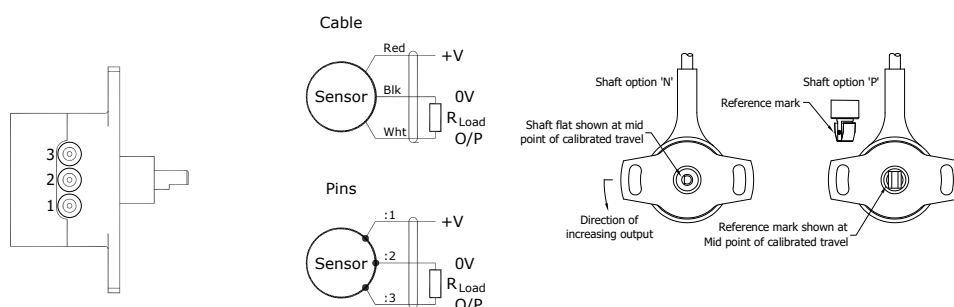

Mechanical Mounting: Flange mounted. The flange slots are 4.5mm by 20 degrees wide, 48mm pitch. The sensor should be mounted with minimal axial and radial loading on the shaft for optimum life. It is recommended that the shaft is coupled to the drive using a flexible coupling.
Option 'N' shaft: Ø 4 mm x 8 mm long, flat 3 mm A/F x 4 mm. Option 'P' shaft: fits 6 x 3 mm slot.

Output Characteristic: The sensor has full rotational freedom and two sectors, 180° apart, over which linear response can be achieved. At the mid point of the calibrated range the output signal will be half full scale deflection, shaft alignment as sketch above. In the calibrated range the output increases as the shaft is rotated in an anti-clockwise direction viewed from the shaft. The calibrated output is factory set to be between 30 and 140°.

Incorrect Connection Protection levels: Not protected – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.



For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

P501-19j

1 of 1