






GAIN & OFFSET ADJUSTMENTS SEALED (CODE 'Y')



AXIAL IP67 SHORT CABLE GLAND (CODE 'Mxx,MQxx')



AXIAL IP65 CONNECTOR DIN 43650 C (CODE 'J')

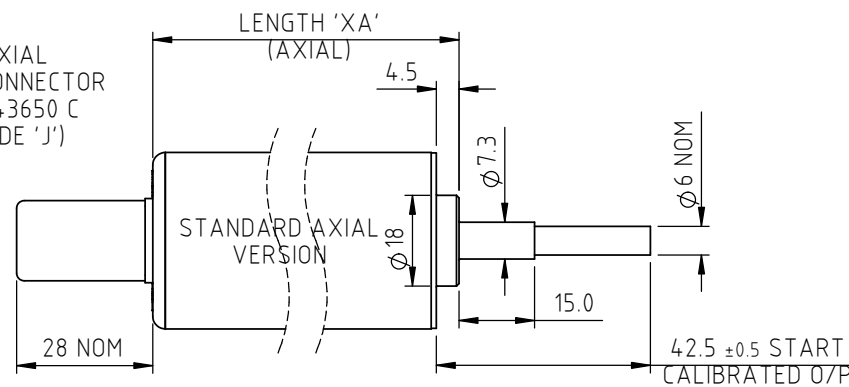



DIRECTION OF TRAVEL →

ELECTRICAL OPTIONS/ SPECIFICATIONS  
 OUTPUT SUPPLY (NOM.)  
 'A' 0.5 - 4.5V RATIOMETRIC 5V  
 SUPPLY CURRENT 12mA TYP. 20mA MAX.  
 CONNECTIONS: CABLE 3-CORE CABLE 5-CORE CONNECTOR  
 +Ve RED RED :1  
 + SENSE (5-WIRE ONLY) - ORANGE :1  
 0V BLACK BLACK :3  
 - SENSE (5-WIRE ONLY) - GREY :3  
 OUTPUT WHITE WHITE :2  
 BODY SCREEN SCREEN :4  
 CABLE: 0.2mm<sup>2</sup>, O/A SCREEN,  
 PUR JACKET O/D; 3-CORE: Ø4mm, 5-CORE: Ø4.6mm,  
 SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm. e.g. 'L50/LQ50' (3/5-CORE)  
 CONNECTORS; MAXIMUM CONDUCTOR CROSS SECTION 0.75mm<sup>2</sup>


RANGE OF DISPLACEMENT FROM 0-51mm TO 0-100mm IN INCREMENTS OF 1mm e.g.36.  
 BODY MATERIAL:- STAINLESS STEEL.  
 FLANGE BASE MATERIAL:- STAINLESS STEEL (CODE 'N')

FURTHER OPTIONS:  
 SINGLE PAIR OF BODY CLAMPS (CODE 'P')  
 SPRUNG PLUNGER, TO EXTENDED POSITION (CODE 'R')  
 DOME END (CODE 'T') IN CONJUNCTION WITH SPRUNG PLUNGER (CODE 'R')  
 PLUNGER FREE (CODE 'V') NOT AVAILABLE WITH SPRUNG OPTION  
 MAGNETIC TIP (CODE 'WA')



GAIN AND OFFSET ADJUSTMENTS NOT AVAILABLE WITH RADIAL BODY, CODE 'Lxx' AND 'K' OPTIONS

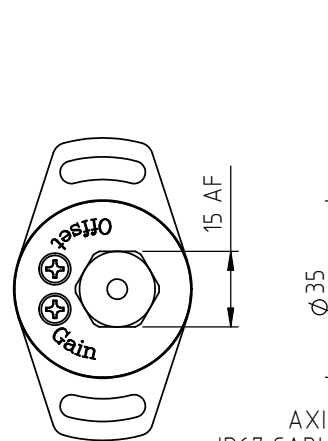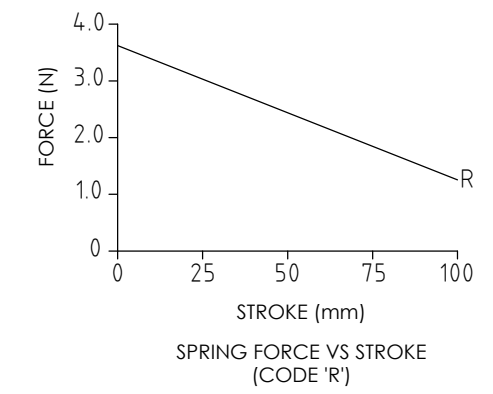

AXIAL IP67 CABLE GLAND (CODE 'Lxx,LQxx')

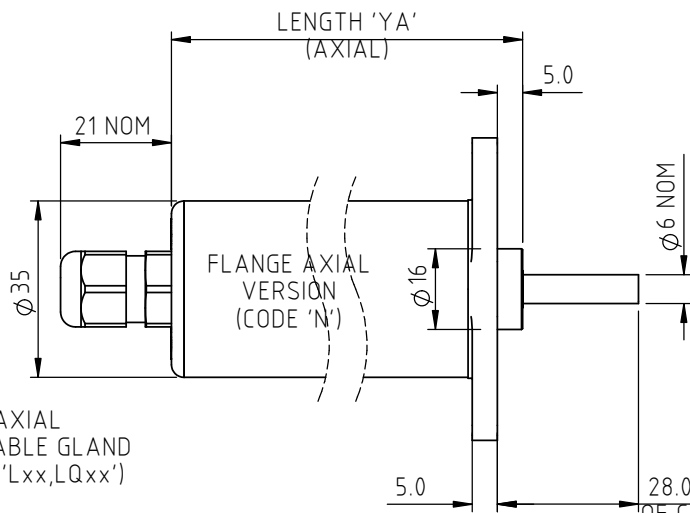


FLANGED BASE 2 OFF 4.5 SLOTS ON 48 PCD

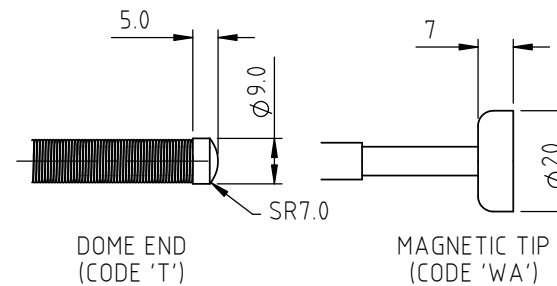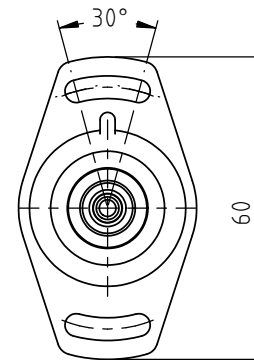


DIRECTION OF TRAVEL →


RADIAL IP67 M12 CONNECTOR IEC 61076-2-101 (CODE 'K')



DIRECTION OF TRAVEL →

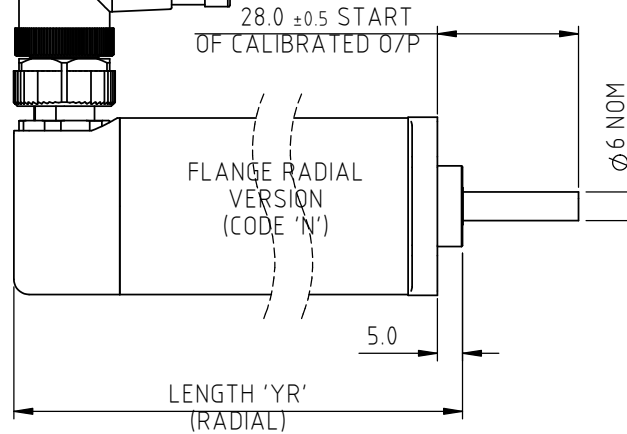


FLANGE RADIAL VERSION (CODE 'N')

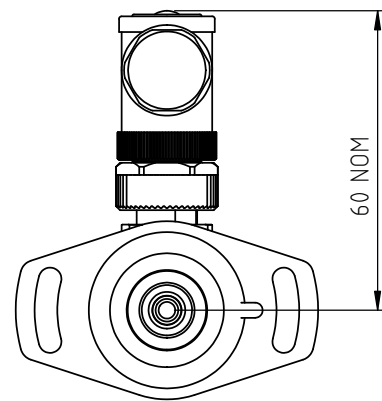


RADIAL IP67 CABLE GLAND (CODE 'Lxx,LQxx')

ROD EYE ORIENTATION NOT GUARANTEED

BODY MOUNTED M5 ROD EYE (CODE 'S')

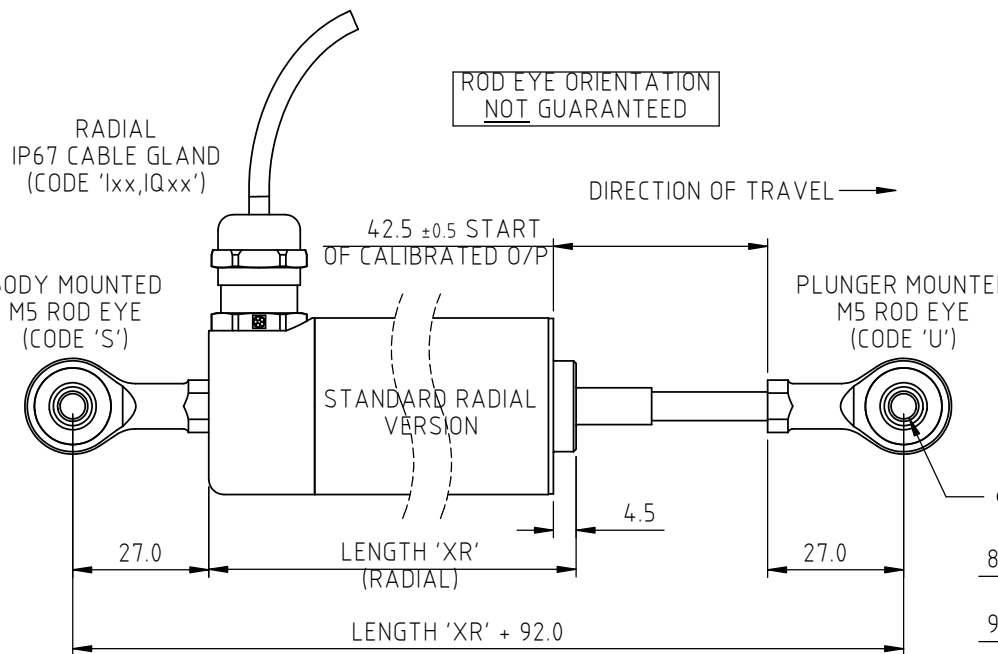

PLUNGER MOUNTED M5 ROD EYE (CODE 'U')

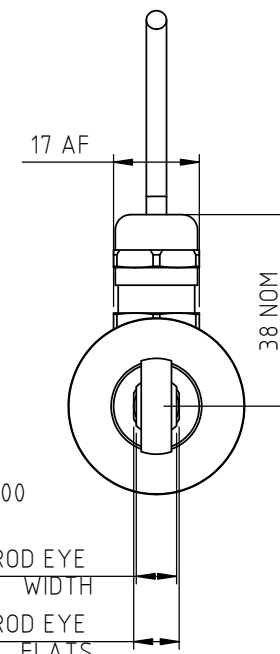

NOTE:- READ INSTALLATION SHEET X133-19 FOR FULL INSTRUCTIONS FOR USE.

**ATEX / IECEx / UKEX APPROVED TO II 1G**  
**Ex ia IIC T4 Ga (Ta= -40° to +80°C)**  
**Ui 11.4V, Ii 0.2A, Pi 0.51W**

APPROVED FOR USE IN CONJUNCTION WITH A GALVANICALLY ISOLATED BARRIER.

NOTE: APPROVAL ONLY APPLIES AT NORMAL ATMOSPHERIC PRESSURE!

DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.  
 CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED BY THE AUTHORISED PERSON.  
 THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

REV	CHANGE HISTORY	DR'WN	DATE	CHK'D
D	MAG TIP & RADIAL END/ROD EYES RAN1311/1312	ASC	21/04/2021	ASC

NOTE: SENSORS WITH TRAVEL UP TO 50mm ARE MADE IN STANDARD LENGTHS					
BODY LENGTH (mm)					
TRAVEL (mm)		STANDARD		FLANGE	
CALIBRATED	MECHANICAL	'XA' AXIAL	'XR' RADIAL	'YA' AXIAL	'YR' RADIAL
0-51 TO 0-70	70	125.0	143.5	141.3	159.8
0-71 TO 0-100	100	155.0	173.5	171.3	189.8

THE PLUNGER RETRACTS 5mm FROM START OF CALIBRATED TRAVEL (2mm FOR SPRUNG VERSIONS) AND EXTENDS 9.5mm\* BEYOND END OF MECHANICAL TRAVEL.  
 \*DOES NOT INCLUDE DIFFERENCE BETWEEN CALIBRATED AND MECHANICAL TRAVEL.  
 DIMENSIONS ARE NOMINAL.  
 'V' CODED PLUNGER WILL DEPART SENSOR BODY.



APPROVED BY	REV		X ±0.4
RDM	D		X.X ±0.2
DESCRIPTION		X.XX ±0.1	
X133 INTRINSICALLY SAFE MID-STROKE LINEAR SENSOR		DIMS mm	
SCALE	2:3	DRAWING NUMBER	
A3		X133-11	
			SHEET 1 OF 1



# X133 MID STROKE LINEAR POSITION SENSOR

## INTRINSICALLY SAFE FOR HAZARDOUS GAS/VAPOUR ATMOSPHERES

- **Intrinsically safe for Gas to: Ex II 1G**
- **Non-contacting inductive technology to eliminate wear**
- **Travel set to customer's requirement**
- **Short body length**
- **Accurate, stable, durable and reliable**
- **Sealing to IP65/IP67 as required**



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications.

Our intrinsically safe X133 incorporates electronics system EX07 which is ATEX / IECEx / UKEX approved for use in potentially explosive **gas/vapour** atmospheres. The X133 is designed for a wide range of industrial applications and is ideal for OEMs seeking good sensor performance in situations where a short-bodied sensor is required for operation in hazardous areas. The unit is compact and space-efficient, being responsive along almost its entire length, and like all Positek® sensors provides a linear output proportional to travel. Each unit is supplied with the output calibrated to the travel required by the customer, from 51 to 100mm and with full EMC protection built in.

Overall performance, repeatability and stability are outstanding over a wide temperature range.

The sensor has a rugged stainless steel body and plunger. It is easy to install and set up, mounting options include flange, M5 rod eye bearings and body clamps. The plunger can be supplied free or captive, with a female M4 thread, an M5 rod eye, magnetic tip, or spring-loaded with a dome end. The X133 also offers a wide range of mechanical options, environmental sealing is to IP65 or IP67 depending on selected cable or connector options.

### SPECIFICATION

<b>Dimensions</b>		
Body diameter		35 mm
Body Length (Axial version):	Dependant on calibrated travel & mounting option	
Calibrated Travel	Standard	Flange mounted
51 mm to 70 mm	125 mm	141.3 mm
71 mm to 100 mm	155 mm	171.3 mm
Body Length (Radial version):	Dependant on calibrated travel & mounting option	
Calibrated Travel	Standard	Flange mounted
51 mm to 70 mm	143.5mm	159.8 mm
71 mm to 100 mm	173.5 mm	189.8 mm
Plunger	Ø 6mm	
For full mechanical details see	drawing X133-11	
<b>Power Supply</b>	+5V dc nom. ± 0.5V, 10mA typ 20mA max	
<b>Output Signal</b>	0.5-4.5V dc ratiometric, Load: 5kΩ min.	
<b>Independent Linearity</b>	≤ ± 0.25% FSO @ 20°C	
	≤ ± 0.1% FSO @ 20°C available upon request.	
<b>Temperature Coefficients</b>	< ± 0.01%/°C Gain &	
	< ± 0.01%FS/°C Offset	
<b>Frequency Response</b>	> 10 kHz (-3dB)	
<b>Resolution</b>	Infinite	
<b>Noise</b>	< 0.02% FSO	
<b>Intrinsic Safety</b>	Ex II 1G	
	Ex ia IIC T4 Ga (Ta= -40°C to 80°C)	
Approval only applies to the specified ambient temperature range and atmospheric conditions in the range 0.80 to 1.10 Bar, oxygen ≤ 21%		
Sensor Input Parameters	Ui: 11.4V, Ii: 0.20A, Pi: 0.51W.	
(connector option/s)	Ci: 1.16µF, Li: 50µH	
(cable option/s)	Ci: 1.36µF, Li: 860µH with 1km max. cable	
<b>Environmental Temperature Limits</b>		
Operating	-40°C to +80°C	
Storage	-40°C to +125°C	
<b>Sealing</b>	IP65/IP67 depending on connector / cable option	
<b>EMC Performance</b>	EN 61000-6-2, EN 61000-6-3	
<b>Vibration</b>	IEC 68-2-6: 10 g	
<b>Shock</b>	IEC 68-2-29: 40 g	
<b>MTBF</b>	350,000 hrs 40°C Gf	
<b>Drawing List</b>		
X133-11	Sensor Outline	
Drawings, in AutoCAD® dwg or dxf format, available on request.		

**Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.**

For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.





# X133 MID STROKE LINEAR POSITION SENSOR INTRINSICALLY SAFE FOR HAZARDOUS GAS/VAPOUR ATMOSPHERES

Intrinsically safe equipment is defined as "equipment which is incapable of releasing sufficient electrical or thermal energy under normal or abnormal conditions to cause ignition of a specific hazardous atmosphere mixture in its most easily ignited concentration."

ATEX / IECEx / UKEX approved to;

Ex II 1G

Ex ia IIC T4 Ga (Ta= -40°C to 80°C)

Designates the sensor as belonging to; Group II: suitable for all areas **except mining**, Category 1 G; can be used in areas with continuous, long or frequent periods of exposure to hazardous gas / vapour (Zones 2 to 0).

Gas / Vapour:

Protection class ia, denotes intrinsically safe for all zones

Apparatus group IIC: suitable for IIA, IIB and IIC explosive gas / vapour.

Temperature class T4: maximum sensor surface temperature under fault conditions 135°C.

Ambient temperature range extended to -40°C to +80°C.

It is imperative Positek® intrinsically safe sensors be used in conjunction with a galvanic barrier to meet the requirements of the product certification. The Positek X005 Galvanic Isolation Amplifier is purpose made for Positek IS sensors making it the perfect choice. Refer to the X005 datasheet for product specification and output configuration options.

### Safety Parameters:-

Uj: 11.4V, Ii: 0.20A, Pi: 0.51W

Ci = 1.36µF\* Li = 860µH\* (cable option/s)

Ci = 1.16µF Li = 50µH (connector option/s)

\*Figures for 1km cable where: Ci = 200pF/m & Li = 810nH/m

Sensors can be installed with a maximum of 1000m of cable.

Cable characteristics must not exceed:-

Capacitance: ≤ 200 pF/m for max. total of: 200 nF.

Inductance: ≤ 810 nH/m for max. total of: 810 µH.

For cable lengths exceeding 10 metres a five wire connection is recommended to eliminate errors introduced by cable resistance and associated temperature coefficients.

ATEX / IECEx / UKEX approved sensors suitable for dust (E series) and mining (M series) applications, are also available from Positek.

## TABLE OF OPTIONS

**CALIBRATED TRAVEL:** Factory set to any length from 0-51mm to 0-100mm (e.g. 76mm).

### ELECTRICAL INTERFACE OPTIONS

The Positek® X005 Galvanic Isolation Amplifier is available with the following output options;

Standard: 0.5 - 9.5V or 4 - 20mA.

Reverse: 9.5 - 0.5V or 20 - 4mA.

### CONNECTOR/CABLE OPTIONS

Connector - 4-pole DIN 43650 C

Connector - 4-pole M12 IEC 61076-2-101

Cable with M12 gland or short gland

Cable with Pg 9 gland

Axial, IP65

Radial, IP67

Axial, IP67

Radial, IP67

†Three core (black jacket) or five core (blue jacket) cable options available. Cable length >50 cm – please specify length in cm up to 15000 cm max.

We recommend all customers refer to the 3 or 5-Wire Mode Connection page.

### MOUNTING OPTIONS


Flange, Body Tube Clamp (axial or radial versions),

M5 rod eye bearings (radial versions only).

**PUSH ROD OPTIONS** – Retained† or Free with M4x0.7 female thread, M5 rod eye bearing or Magnetic tip, Spring loaded with or without‡ Dome end.

† standard, retained with female thread.

‡ spring supplied loose.

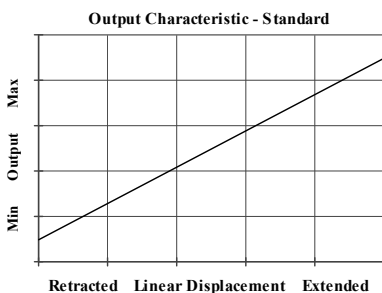

For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.





# Three or Five-Wire Mode Connection FOR INTRINSICALLY SAFE SENSORS IN HAZARDOUS ATMOSPHERES

The aim of this document is to help readers who do not understand what is meant by three or five wire modes of connection between the galvanic isolation amplifier and sensor, and the factors behind them. It is by no means an in-depth technical analysis of the subject.

Whether opting for a pre-wired Positek® Intrinsicly Safe sensor or one with a connector, choosing the right mode of connection and cable to suit the application requires careful consideration.

Interconnecting cables are not perfect conductors and offer resistance to current flow, the magnitude of resistance<sup>†</sup> depends on conductors resistivity, which changes with temperature, cross sectional area<sup>‡</sup> and length. If the voltage were to be measured at both ends of a length of wire it would be found they are different, this is known as volts drop. Volts drop changes with current flow and can be calculated using Ohm's law, it should be noted that volts drop occurs in both positive and negative conductors. The effects of volts drop can be reduced by increasing the conductors cross sectional area, this does not however eliminate the effects due to temperature variation. There are instances where large cross-section cables are not practical; for example most standard industrial connectors of the type used for sensors have a maximum conductor capacity of 0.75mm<sup>2</sup>, copper prices and ease of installation are other considerations.


This is important because the effects of volts drop can significantly alter the perceived accuracy of the sensor which is ratiometric i.e. the output signal is directly affected by the voltage across the sensor. Changes in temperature will also be seen as gain variation in the sensor output.

**Three wire mode** connections are common and are suitable in most cases with short or moderate cable runs. Applications that do not require a high degree of accuracy but have cable runs, say in excess of 10m, volts drop can be reduced by introducing a terminal box close to the sensor and using a larger cross-section cable for a majority of the cable run. Sensors supplied with three core cable are calibrated with the cable fitted which largely eliminates errors due to conductor resistance at room temperature however, as mentioned above, small gain errors due to temperature fluctuations should be expected.

**Five wire mode** connections have significant benefits as losses in the positive and negative conductors are compensated for by the galvanic isolation amplifier which can 'sense' the voltage across the sensor and dynamically adjust the output voltage so that the voltage across the sensor is correct. The effects of cable resistance and associated temperature coefficients are eliminated allowing for smaller conductors than a three wire connection for the same cable run. The amplifier can compensate for up to 15Ω per conductor with a current flow of 15mA, which is more than adequate for 150m of 0.25 mm<sup>2</sup> cable, longer lengths will require larger conductors.

**For this reason Positek® recommends five wire connections for cable lengths exceeding 10 metres in 0.25 mm<sup>2</sup> cable to preserve the full accuracy of the sensor.**

See illustrations below for examples of connecting a sensor to the galvanic isolation amplifier.

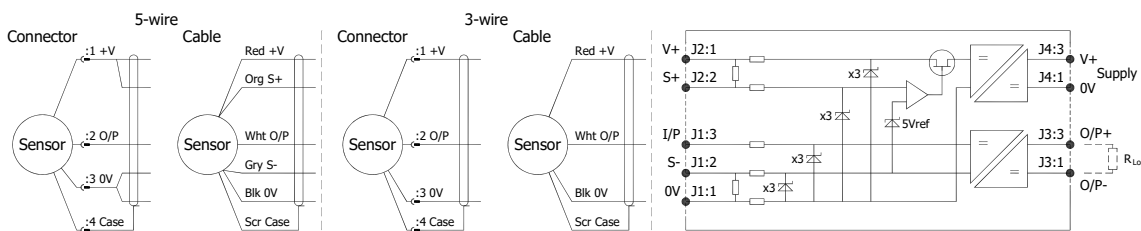

Cable Length (metres)	Up to 150	150 - 300	300 - 450	450 - 600	600 - 900	900 - 1000
Cross Section (mm <sup>2</sup> )	0.25	0.5	0.75	1.0	1.5	2.0

The table above shows recommended conductor sizes with respect to cable length for both three and five wire connections, based on copper conductors. Three wire connections will introduce a gain reduction of 5% and a ±1% temperature dependence of gain over the range -40°C to +80°C for the cable temperature. (i.e. about -150 ppm/°C for the maximum lengths shown and less pro rata for shorter lengths.)

It should be noted that the maximum cable length, as specified in the sensor certification, takes **precedence** and **must not** be exceeded.

Positek® sensors are supplied with three core 0.25 mm<sup>2</sup> cable as standard, however five core 0.25 mm<sup>2</sup> cable can be supplied on request. The galvanic isolation amplifier is available as;

G005-\*\*\* for 'G' and 'H' prefix sensors  
X005-\*\*\* for 'E', 'M' and 'X' prefix sensors

<sup>†</sup>  $R = \rho L/A$   $\rho$  is the resistivity of the conductor ( $\Omega m$ )  $L$  is the length of conductor (m)  $A$  is the conductor cross-sectional area (m<sup>2</sup>).

<sup>‡</sup> It is presumed that direct current flow is uniform across the cross-section of the wire, the galvanic isolation amplifier and sensor are a dc system.



For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

X133-17f

3 of 3

# Intrinsically Safe - Gas/Vapour Atmospheres

## X133 Mid Stroke Position Sensor

a	b	c	d	e	f	g	h	j	k
X133	Displacement	A	Adjustments	Connections	Option	Option	Option	Option	Z-code

a Displacement (mm)		Value
Displacement in mm	e.g. 0 - 66 mm	<b>66</b>
b Output		
Supply V dc V <sub>s</sub> (tolerance)	Output	Code
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)	<b>A</b>
c Calibration Adjustments		Code
Accessible - default <sup>†</sup>	<sup>†</sup> Axial body style only. Radial body style sealed by default.	blank
Sealed		<b>Y</b>
d Connections Cable or Connector		Code
Cable Gland - Radial	IP67 metal - 3-core cable	<b>Ixx</b>
	IP67 metal - 5-core cable	<b>IQxx</b>
	IP65 DIN 43650 `C`	<b>J</b>
Connector - Axial	pre-wired - 3-core cable	<b>Jxx</b>
	pre-wired - 5-core cable	<b>JQxx</b>
	IP67 M12 IEC 60176-2-101 nylon	<b>K</b>
Connector - Radial	pre-wired - 3-core cable	<b>Kxx</b>
	pre-wired - 5-core cable	<b>KQxx</b>
	IP67 nylon - 3-core cable	<b>Lxx</b>
Cable Gland - Axial	IP67 nylon- 5-core cable	<b>LQxx</b>
	IP67 Short - 3-core cable	<b>Mxx</b>
Cable Gland <sup>†</sup> - Axial	IP67 Short - 3-core cable	<b>Mxx</b>
	IP67 Short - 5-core cable	<b>MQxx</b>
Specify required cable length `xx` in cm. e.g. L2000 specifies cable gland with 20 m of cable, 50 cm supplied as standard. <sup>†</sup> Nb: restricted cable pull strength.		
e Housing		Code
Standard - default		blank
Flange Mount		<b>N</b>
M5 Rod-eye Bearing	Radial body style only	<b>S</b>
f Body Fittings		Code
None - default		blank
Body Clamps - 1 pair		<b>P</b>
g Sprung Plunger		Code
None - default		blank
Spring Extend	Captive plunger only.	<b>R</b>
h Plunger Fittings		Code
None - default		Female Thread M4x0.7x7 deep
Dome end		Requires option `R`
M5 Rod-eye Bearing		<b>U</b>
Magnetic Tip		<b>WA</b>
j Plunger Options		Code
Captive - default		Plunger is retained
Non-captive		Plunger can depart body
		<b>V</b>

k Z-code	Code
Calibration to suit X005 - Default	<b>Z000</b>
Connector IP67 M12 IEC 60176-2-101 must have options `Y` & `J`	<b>Z600</b>
Connector IP67 M12 IEC 60176-2-101 must have option `J`	<b>Z601</b>
≤± 0.1% @20°C Independent Linearity displacement between 10mm & 50mm only!	<b>Z650</b>

### Note!

All Intrinsically Safe (IS) sensors must have a Z-code suffix.

IS sensors must be used in conjunction with a Galvanic Isolation Amplifier - See X005 for Output options.




# Installation Information

## X133 MID STROKE LINEAR POSITION SENSOR

### INTRINSICALLY SAFE FOR HAZARDOUS GAS/VAPOUR ATMOSPHERES

For certificate number and safety parameters information for product marked EX04, see next page.

ATEX / IECEx / UKEX Qualified to Intrinsic Safety Standard Certificate numbers SIRA 13ATEX2371X IECEX SIR 13.0154X CSAE 21UKEX2537X		Ex II 1G Ex ia IIC T4 Ga (Ta = -40°C to +80°C)	
Electronics Version	Output Description:	Supply Voltage: Vs (tolerance)	Load resistance:
EX07	0.5 - 4.5V (ratiometric with supply) [Output code 'A']	+5V (4.5 - 5.5V)	5kΩ min

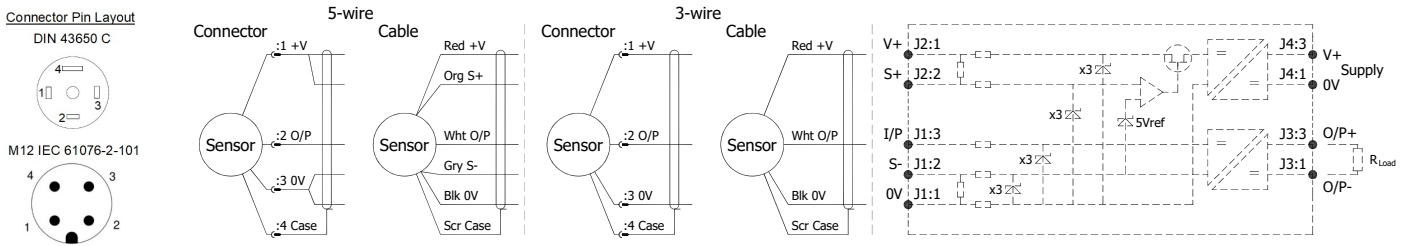

**Putting Into Service:** The sensor must be used with a galvanic isolation barrier designed to supply the sensor with a nominal 5V and to transmit the sensor output to a safe area. The barrier parameters must not exceed:-

**Ui = 11.4V**                      **Ii = 0.20A**                      **Pi = 0.51W**  
**Ci = 1.36µF\***                      **Li = 860µH\***                      (Options: 'Ixx', 'IQxx', 'Lxx', 'LQxx', 'Mxx', 'MQxx') \*Figures for 1km cable  
**Ci = 1.16µF**                      **Li = 50µH**                      (Options: 'J', 'K')

The sensor is certified to be used with up to **1000m** of cable, cable characteristics must not exceed:-

Capacitance: ≤ 200 pF/m      or max. total of:      200 nF  
 Inductance: ≤ 810 nH/m      or max. total of:      810 µH

Approval only applies to specified ambient temperature range and atmospheric conditions in the range: 0.80 to 1.10 Bar, oxygen ≤ 21%.

The performance of the sensor may be affected by voltage drops associated with long cable lengths; For cable lengths exceeding 10 metres a five wire connection is recommended to eliminate errors introduced by cable resistance and associated temperature coefficients.

**Warning** - The IEC 60176-2-101 connector may be rotated for purposes of convenient orientation of the connector and cable, however rotating the connector more than one complete revolution is not recommended. **Repeated rotation of the connector will damage the internal wiring!**

**Special Condition for Safe Use:**

The apparatus does not meet the 500 V r.m.s dielectric strength test between circuit and frame, in accordance with clause 6.3.13 of IEC 60079-11:2011. This must be taken into consideration on installation.

When using a Sensor that has an integral cable in a dust application, the free end of the cable shall be appropriately terminated for the zone of use.

Under certain extreme circumstances, the non-metallic and isolated metal parts incorporated in the enclosure of this equipment may generate an ignition-capable level of electrostatic charge. Therefore the equipment shall not be installed in a location where the external conditions are conducive to the build-up of electrostatic charge on such surfaces. This is particularly important if the equipment is installed in a zone 0 location. In addition, the equipment shall only be cleaned with a damp cloth.

**Use:** The sensor is designed to measure linear displacement and provide an analogue output signal.


**Assembly and Dismantling:** The unit is not to be serviced or dismantled and re-assembled by the user.

**Maintenance:** No maintenance is required.

**Gain and Offset Adjustment:** (Where accessible - Typically ± 10% Min available)

To adjust the gain or offset use a small potentiometer adjuster or screwdriver 2mm across. Do not apply too much force on the potentiometers.

**Mechanical Mounting Options:** Depending on options, body can be mounted by flange, rod eye bearings or clamping the sensor body - body clamps are available, if not already ordered. Plunger mounted by M4x0.7 female thread, rod-eye bearing or magnetic tip.




**Output Characteristic:** Plunger extended, at start of normal travel, from mounting face by:

Standard body : 42.5 mm\*  
Flanged body : 28 mm

\*Note: where dome end option is fitted add 5 mm.

The output increases as the plunger extends from the sensor body, the calibrated stroke is between 51 mm and 100 mm.

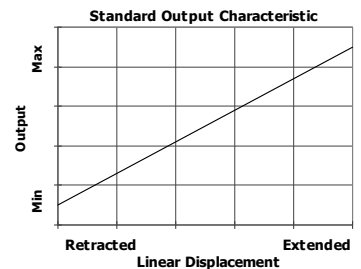

**Incorrect Connection Protection levels: Not protected** – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.



For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.