

General Purpose Aerospace Pressure Transducer



Features

- ➔ Available with Built in Electronic
- ➔ All Stainless steel
- ➔ Robust and reliable sensor
- ➔ Large Bandwidth

Applications

- ➔ Aerospace
- ➔ OEM
- ➔ Military
- ➔ Test benches

The PGA220 series is a general purpose aerospace pressure sensor. The sensing element is an advanced piezo-resistive pressure module which together with the latest compensation techniques, provides high performance measurements. It is available with unamplified (mV/V) or amplified (Vdc, mA) outputs. Wetted parts being all stainless steel (other materials are available on request), the sensor is compatible with most media used in Aerospace industry, especially corrosive ones (Skydrol, Kerosene...). High accuracy pressure measurements on test bench is one of the main application for the PGA220. Thanks to compact dimensions and a large choice in mechanical and electrical connections, installation is easier.

Technical specifications



| | |
|--|--|
| Pressure ranges (FS) | -1/+2bar ; -1/+5bar ; 3bar ; 5bar ; 10bar ; 20bar ; 40bar ; 100bar ; 250bar ; 400bar ; 600bar ; -14.5/+30PSI ; -14.5/+70PSI ; 8000PSI ; 40PSI ; 70PSI ; 150PSI ; 300PSI ; 500PSI ; 1500PSI ; 3000PSI ; 10000PSI ; 5000PSI |
| Type | Absolute ; Gage |
| Type (for ranges > 40 bar) | Sealed Gage |
| Safe overload | 150% FS |
| Burst pressure | 300% FS |
| Power supply | 8 to 30Vdc |
| Consumption | < 10mA |
| Insulation | > 1000 MOhms under 50Vdc at ambient temperature |
| Output at -100%FS (only for ± range) | 0.5Vdc |
| Output at 0%FS (except ranges ±) | 0.5Vdc |
| Output at 100%FS | 4.5Vdc |
| Zero and sensitivity settings tolerances | ±50mV |

Technical Specifications

| | |
|--|--|
| Non linearity and hysteresis combined | ±0.25% FS Option : ±0.1% FS |
| Non repeatability | ±0.02% FS typ. |
| Signal bandwidth | 1000Hz @ -3dB |
| Compensated temperature range | -55 to +125°C |
| Operating temperature range | -55 to +125°C |
| Combined thermal zero & sensitivity shifts | ±0.03% FS/°C Option : ±0.02% FS/°C |
| Constant acceleration in linear vibrations | ± 0.02% FS/g (frequency 20-2000Hz, 50g max.) |
| Mechanical shock | 100g ½ sinus 1ms |
| Electrical protection | Protected against polarity inversion |
| EMC protection | Compliant to EN61000 |
| Electrical connection | Hermetic MIL-C-26482 - 6 pins Receptacle Option : MIL-DTL-38999 - 6 pins Receptacle |
| Mechanical connection | 1/4 Gaz A male ; M14x1.5-4h male Option : 7/16-20 UNJF-3A male - MS33656-4 ; M10x1-4h male with 80° internal cone |
| Material(s) of wetted parts | Stainless Steel 316L ; Stainless Steel 17-4PH ; Stainless steel 15-5PH |
| Weight | < 120g without cable |
| Enclosure protection | IP67 for absolute & sealed gage version |

Codification

| | | | | | | | | | | |
|---|-------|---|---|-------|----|----|----|---|---|---|
| General Purpose Aerospace Pressure Transducer | PGA22 | 7 | S | 10bar | A | 01 | 03 | E | 1 | 1 |
| Output Signal | | | | | | | | | | |
| 0.5-4.5Vdc unregulated power supply | | 7 | | | | | | | | |
| Material | | | | | | | | | | |
| Stainless Steels | | | S | | | | | | | |
| Range | | | | | | | | | | |
| Example | | | | 10bar | | | | | | |
| Type | | | | | | | | | | |
| Absolute | | | | | A | | | | | |
| Gage | | | | | G | | | | | |
| Sealed Gage | | | | | SG | | | | | |
| Mechanical connection | | | | | | | | | | |
| M14x1.5-4h male | | | | | | 01 | | | | |
| 1/4 Gaz A male | | | | | | 07 | | | | |
| 7/16-20 UNJF-3A male - MS33656-4 | | | | | | 10 | | | | |
| M10x1-4h male with 80° internal cone | | | | | | 19 | | | | |
| Electrical connection | | | | | | | | | | |
| Hermetic MIL-C-26482 - 6 pins Receptacle | | | | | | | 03 | | | |
| MIL-DTL-38999 - 6 pins Receptacle | | | | | | | 20 | | | |
| Compensated temperature range | | | | | | | | | | |
| -55 to +125°C | | | | | | | | E | | |
| Non linearity and hysteresis combined | | | | | | | | | | |
| ±0.25% FS | | | | | | | | | 1 | |
| ±0.1% FS | | | | | | | | | 2 | |
| Combined thermal zero & sensitivity shifts | | | | | | | | | | |
| ±0.02% FS/°C | | | | | | | | | | 1 |
| ±0.03% FS/°C | | | | | | | | | | 3 |

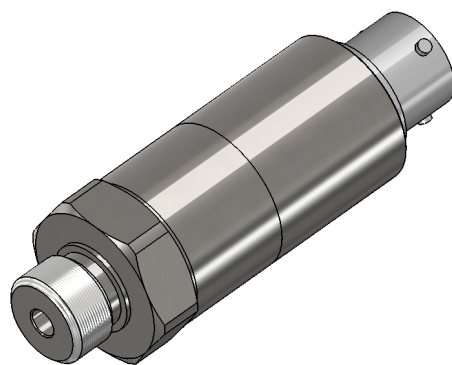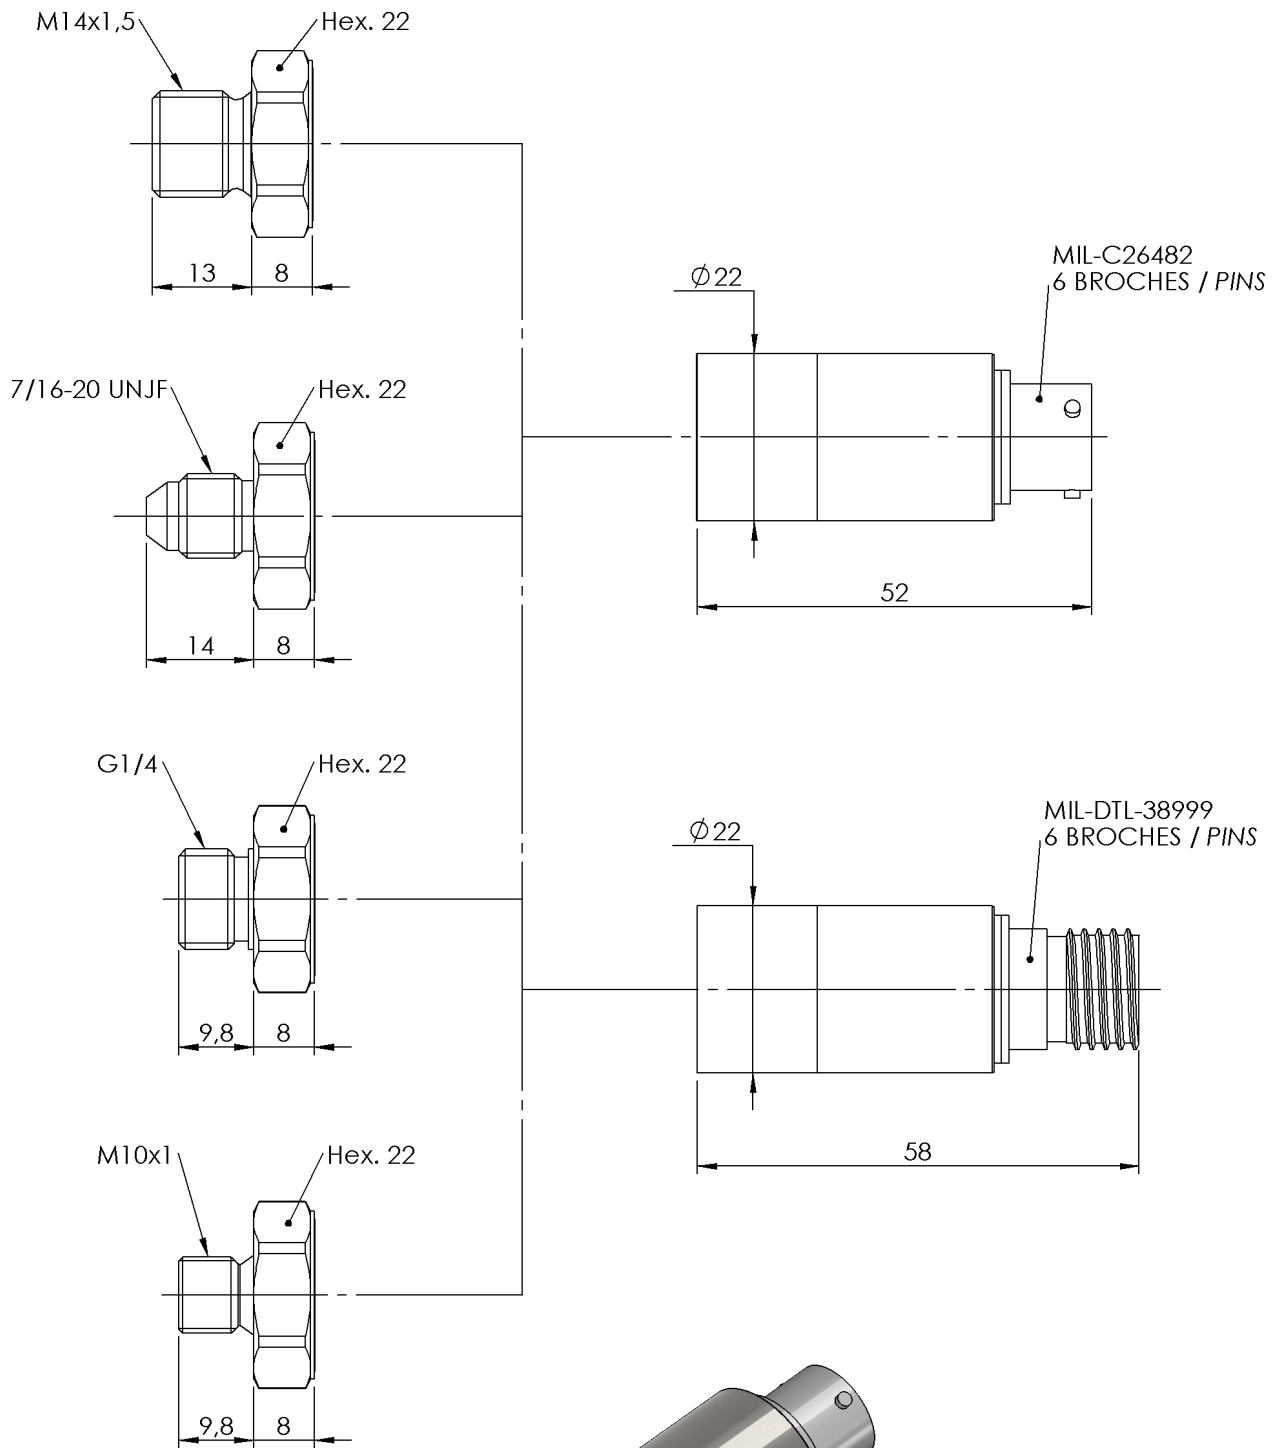


Dimensions : mm

MIL-C26482 - 6 PINS




| VOLTAGE OUTPUT | PIN |
|----------------|------------|
| + EXCITATION | PIN A |
| + SIGNAL | PIN B |
| 0 VOLT | PIN C |
| 0 VOLT | PIN D |
| SENSOR HOUSING | PINS E & F |



MIL-DTL-38999 - 6 PINS



| VOLTAGE OUTPUT | PIN |
|----------------------|-------------------|
| + EXCITATION | PIN 1 |
| + SIGNAL | PIN 3 |
| - SIGNAL (0 Vdc) | PIN 4 |
| - EXCITATION (0 Vdc) | PIN 2 |
| NC | PIN 5 |
| NC | PIN 6 |
| SENSOR HOUSING | CONNECTOR HOUSING |

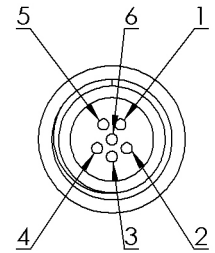

Agent :



E.F.E.
 L'ESSOR FRANCAIS ELECTRONIQUE
 16 Rue Porte a Bateaux - 27540 Ivry-la-Bataille - FRANCE
 Tel : 33 (0)2 32 22 35 05 - Fax : 33 (0)2 32 36 93 08
www.efe-sensor.com - infos@efe-sensor.com