
6210 Bluetooth® Transmitter



- Secure PAN (Personal Area Network), with up to 2 transmitters
- Ultra low power with 1µA sleep current
- Range: Nominally 10 m (up to 25 m line of sight, Latency may increase with range)
- Selectable Latency:
 - Setting 1. Typically <150 ms at 10 m
 - Setting 2. Typically <75 ms at 10 m
- LED indication of battery status
- Choice of 15 or 60 minutes timeout for further battery conservation
- Auto wake from sleep/re-connect on press of the pedal
- Externally accessible IPx7 battery compartment
- · Runs on commercially available Alkaline cells



Reference Dimensions mm

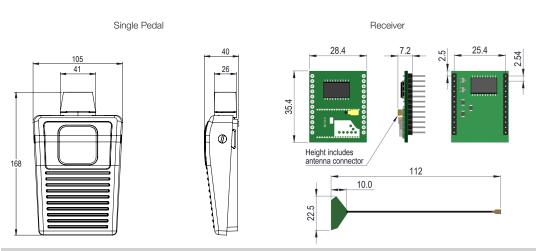

Specifications

| Supply rating | Receiver: 5 - 24V DC Footswitch: 2 x AAA Alkaline batteries | |
|----------------------|--|--|
| Output configuration | Open collector transistor outputs, (24V DC 100mA Max.) | |
| Degree of protection | EN 60529 IPx7 | |
| Connections | Receiver connections via 2.54 mm pitch PCB pin header, suitable for connections to LEDs and push button or microcontrollers: • Transistor Output • 1 pairing button Input • 1 pairing process indication output • 1 battery level indication output • 2 transmitter connection status indication outputs • Sleep timeout select input • Latency Select Input, typically <100mS or <200mS for extended battery life • Power Connections | |

| Operating temperature | 0 to +40°C |
|------------------------------|---|
| Body material | Thermoplastic |
| Standards/approvals | Low Voltage Directive 2014/35/EU, REACH, RoHS & WEEE |
| Radio type approvals | Europe (ETSI RED) US (FCC/CFR 47 part 15 unlicensed modular transmitter approval) Canada (IC RSS) |
| Certification and compliance | Radio Equipment Directive 2014/53/EU: • Effective use of frequency spectrum: EN 300 328 • EMC: EN 301 489-1, EN 301 489-17, EN 61000-6-2 • Health and safety: EN62479, EN 60950-1 Medical Device Directive 93/42/EEC: • EN 60601-1-2 Compliant (Customer's risk assessment required) • EN 60601-1 |

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Herga Technology is under license. Other trademarks and trade names are those of their respective owners.



6210 Bluetooth® Transmitter



Ordering & Options



| | | 6210 BLE -A A A |
|---------------------------|---|-----------------|
| Footswitch | | |
| Cover colour A B | Grey Black Other colours to be discussed with sales | |
| Label AA XX | Herga Label Customer specific | |



Receiver

001 - 8 open collector transistor outputs

002 - Housed, 6 relay outputs

XXX - Customer specific









6311 BLE - 0 0 1



