


6289-0366 - Footswitch

- Versatile compact footswitch
- Durable and reliable with steel housing for long life and reliability
- Low profile to reduce operator fatigue
- Powder coat grey hammer tone cover & base with black tread
- Momentary action
- Single pole normally change over contacts
- Supplied with 2.5 meters of black 4 core cable fitted with bootlace ferrules
- Sealed to IPX7
- 3A 24V AC/DC
- Operating Temperature: - 5°C to +40°C.

Images & Dimensions

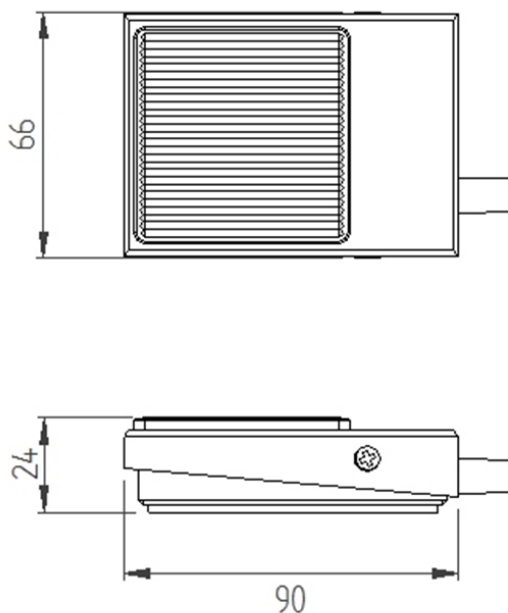

Specifications

Electrical rating	3A 24V AC/DC
Contact Configuration	Single pole change over contacts
Degree of protection	EN 60529 IPX7
Operating temperature	-5°C to +40°C
Body Material	16 SWG mild steel, powder coat grey hammertone
Connection method	2 meters of black 3 core cable
Weight	Approx.: 0.2kg