


6289-0B Foot Bellow

- Compact and robust construction
- Colour options available upon request
- Temperature range: -10°C...+40°C



Reference Dimensions mm

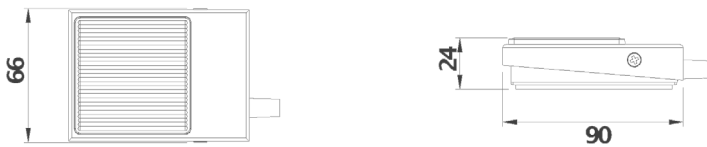

Specifications


Standards/approvals	N/A
Connection method	complete with 2m tube (black) with 3mm I/D 3mm I/D & 6mm O/D, which are available in different length
Electrical rating	n / a
Pressure range	Works with 6871, 6872, 6773, 6753, 6891, 6893, 6861, 6862, 6863, 6864, 6869 - dependent on tube length

Electrical rating	N/A
Contact configuration	N/A
Operating temperature range	-10°C to +40°C
Body material	16 SWG mild steel, powder coat grey hammertone
Weight	0.25 kg

Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard



With 6202 Guard