

# 6450 Pneumatic Hand Control



Technology Ltd

- Large soft buttons
- Ergonomic design for comfort
- Light operating force
- Choice of curly or straight tubing
- Various colour & ident options
- Inherently waterproof
- For use with 6871 & 6872 airswitches




## General Specifications

Standards/ approvals	n/a	Operating temperature range	-5°C to +40°C with temperature compensated airswitches
Degree of protection	n/a	Body material	Thermoplastic
Connection method	1.5mm I/D tube for use with airswitches with 2mm spouts	Weight	135 g approx.
Electrical rating	n/a	Additional information	Various attachment methods and labels available
Contact configuration	n/a		
Pressure range	n/a		

Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

## Reference Dimensions in mm

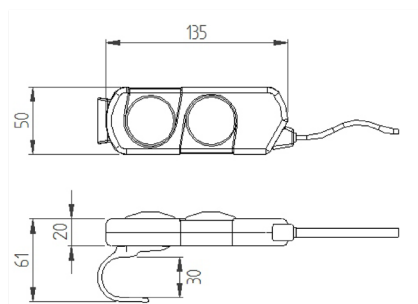

## Ordering and options

6450 -     -

<b>Model</b>	
<b>Body colour -</b>	
A Grey	B Black
<b>Body -</b>	
A With moulded Herga logo	D With blank recess
B With printed Herga logo	E Without label recess
C With printed operation logo (select from options below)	
<b>Operation label options -</b>	
A Bed motif - Head up/down	
B Bed motif - Bed up/down	
C Bed motif - Legs up/down	
D Arrows - up/down	
Z No label required	
<b>Button colour -</b>	
A Grey	D White
B Blue	E Red
C Black	F Green
<b>Button labelling -</b>	
A Plain buttons	B Buttons with embossed arrows <sup>1</sup>
<b>Tube type -</b>	
A Grey twin polyurethane 1.5 mm bore	
B Grey twin polyurethane curly coil	
C Grey twin 1.5 mm with round socket	
D Grey twin curly coil with round socket	
<b>Tube length -</b>	
A 2 metres	
B 3 metres	
F Curly coil - unstretched 0.9 m, stretched 2.4 m	
<b>Fixtures -</b>	
A With hook	B With suction cup Z No fixtures