


# 6451-0002 - 2 Way Air Hand Control

- Soft touch buttons
- Ergonomic design for comfort, light operating force
- 2 button 6451 pneumatic hand control, grey body
- Mounting hook fitted
- Bellows configuration:-
  - Top bellow - Grey bellow with UP arrow
  - Bottom bellow - Grey bellow with DOWN arrow
- Fitted with grey curly coil polyurethane 1.5mm bore tubing with collar with brass connectors
- Panel mount kit connector supplied
- Packed in bubble pouch
- Operating Temperature: -5°C to +40°C



## Images & Reference Dimensions

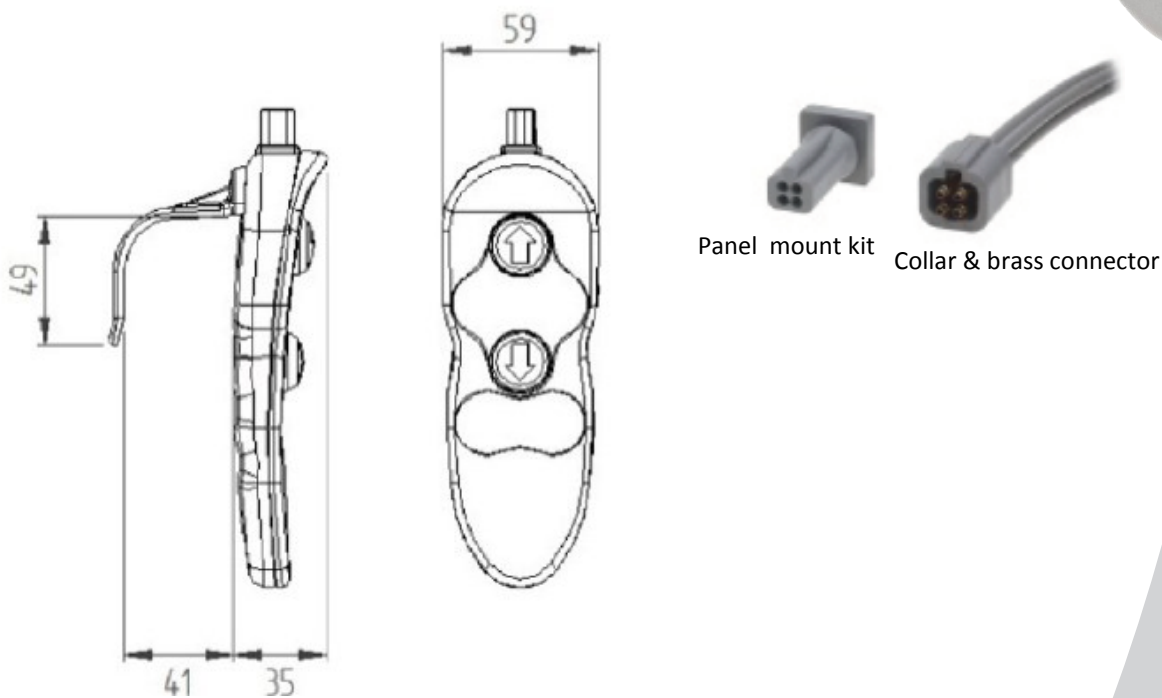

## Specifications

Electrical rating	N/A
Contact Configuration	N/A
Degree of protection	N/A
Operating temperature	-5°C to +40°C with temperature compensated air switch
Body Material	Thermoplastic
Connection method	1.5mm I/D tube for use with air switches with 2mm spout
Weight	Approx.: 0.2kg