


SK-6289-CC - Footswitch

- Versatile compact footswitch
- Durable and reliable with steel housing for long life and reliability
- Low profile to reduce operator fatigue
- Powder coat grey hammer tone cover & base with black tread
- Momentary action
- Single pole change over contacts
- Supplied with 2 meters of black 4 core cable free wire ends
- Sealed to IPX2
- 3A 250V AC
- Operating Temperature: - 5°C to +40°C.

Images & Dimensions

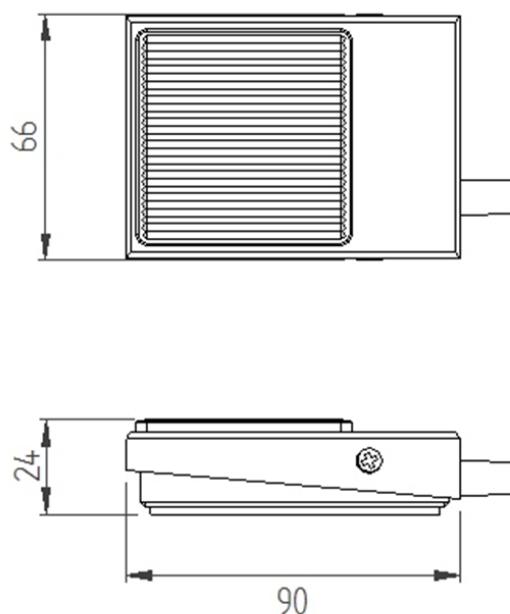

Specifications

Electrical rating	3A 250V AC
Contact Configuration	Single pole normally open
Degree of protection	EN 60529 IPX2
Operating temperature	-5°C to +40°C
Body Material	16 SWG mild steel, powder coat grey hammertone
Connection method	2 meters of black 4 core cable free wire ends
Weight	Approx.: 0.412kg
Standards / approvals	Footswitch : low voltage directive 2006/95/EC Micro switch: EN 61058-2-1, EN61058