

# 6229 Industrial Footswitch




Technology Ltd

## For IPX7 single pole switching

- Low profile, rear hinged switch designed for improved user comfort
- All plastic construction with raised tread pattern and anti-slip pad
- Versatile and innovative design make it an ideal product for OEM use
- Switches designed to meet industrial/office/commercial standards
- Increased temperature range of -20 to +80°C




## Reference dimensions

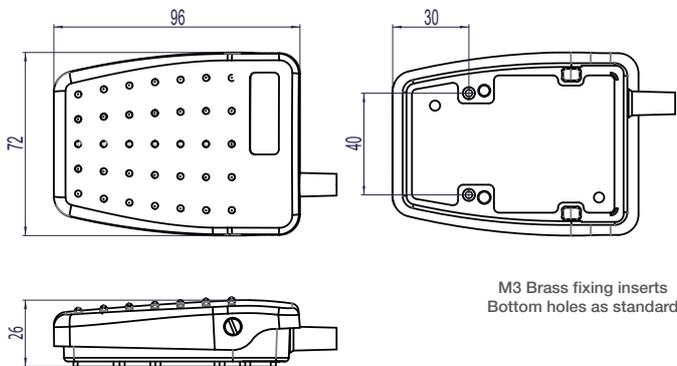

## General specifications

|                       |  |                             |  |
|-----------------------|--|-----------------------------|--|
| Standards/approvals   | Footswitch: Low voltage directive 2014/35/EU, EN 60950 | Operating temperature range | -20°C to +80°C   |
| Degree of protection  | EN 60529 IPX7  | Body material               | Thermoplastic  |
| Connection method     | 2 m of cable with stripped cable cores                 | Weight                      | 0.14Kg (including cable)   |
| Electrical rating     | Max. 3A 250V AC/DC                                     | Additional information      | Customized versions available (logos, cordsets, colours, guards) |
| Contact configuration | SPCO   |                             |  |

## Ordering and options

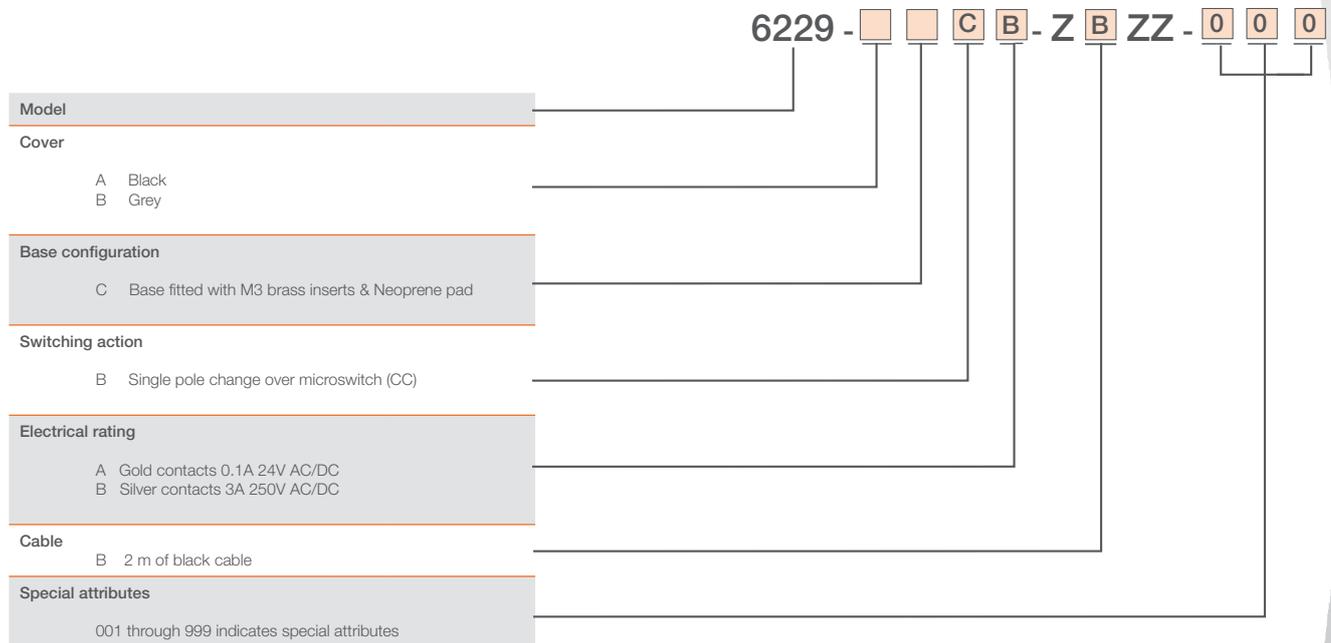

## Accessories

| Part Number | Description                 |
|-------------|-----------------------------|
| 6202-0001   | Single Black RAL 9005 guard |
| 6202-0002   | Single Grey RAL 7035 guard  |
| 6202-0003   | Twin Grey RAL 7035 guard    |



With 6202 Guard