
## 6252 Heavy Duty Footswitches

- Average life expectancy 1 x 10<sup>6</sup> operations
- Rugged high performing heavy duty footswitch
- · Customer colours and logos available on request
- Forced break positive opening contacts
- Distinctive styling



rc

## Reference dimensions

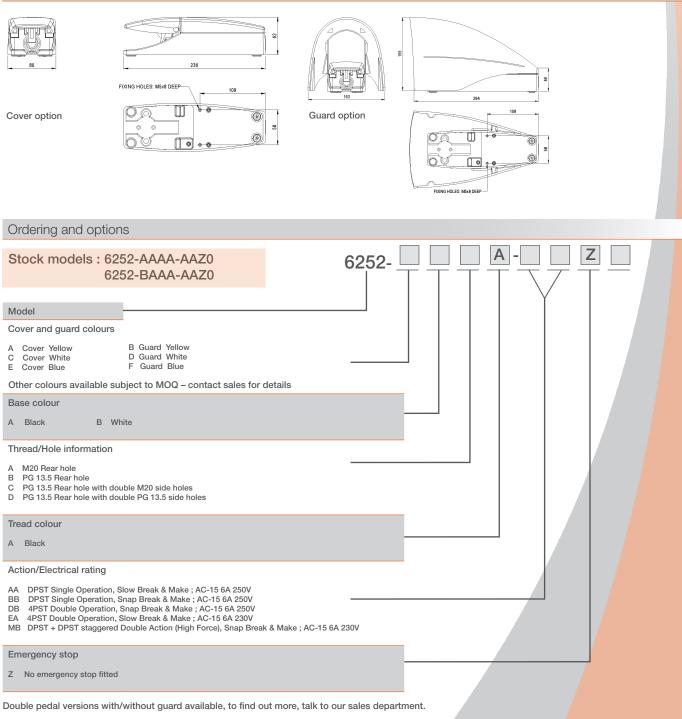



Subject to change without notice

## 6252 Heavy Duty Footswitches




## General specifications

Standards/approvals	EN60204-1 with switching to meet EN60947-5-1, VDE 0660 pt 200, IEC 947-5-1	Operating temperature range	-25°C to +60°C	
Degree of protection	EN 60529 IP67 (IP68 upon request)	Body material	Die cast aluminium	
Connection method	Screw terminals, stripped cable cores or connector of your choice	Weight	Cover/unguarded 1Kg or 1.5Kg guarded	
Electrical rating	See table below	Average mechanical life	1 x 10 <sup>6</sup> operations	
Contact configuration	See table below	Additional information	the electrical housing has an environmental rating of IP67. To achieve this, a minimum torque of 1.7N should be applied to the two enclosure screws	

	Options A &	Options A & B in electrical rating section				Options D in electrical rating section		
Rated operating voltage	500V AC,	500V AC, over 380V AC same potential only						
		AC 40 - 60 Hz			DC	AC 50	) - 60 Hz	
	Le/AC-12	Ue	Le/AC-15	Ue	Le/DC-12	Ue (V)	Le/AC-15 (A)	
	(A)	(V)	(A)	(V)	A)			
	10	24	10	24	10	230	3	
Rated operational current	10	125	10	48	6			
nated operational current	10	230	6	110	4			
	10	400	4	220	1			
	10	500	3	440	0.5			
	Limit switches	also avai	able with gold	contacts				
Note: When the footswitch is supplied with a pre-wired cordset, the cordset rating takes precedence over the footswitch rating. The rating will be marked on the cordset								
Electrical Life Expectancy at Category AC-15 0.5 X 10 <sup>6</sup> switching cycles when interrupting 6A AC-15 at 250V								
Contact configuration Normally open + normally closed positive opening operation to EN 60947-5-1								
Contact Gap	>3mm, suitable for mains isolation							
Terminals	Screw termin	Screw terminals and self-lifting clamp for connection of flexible Screw terminals for connection of flexible lead wire;						

Terminals	leads; min. 2 x 1.5 mm <sup>2</sup> -		min. 1 x $0.5 \text{ mm}^2$ - max. 2 x $2.5 \text{ mm}^2$			
Action Type from Order Code	А	В	D	E	MB	
Limit switch action	1 Pole Slow Make Slow Break	1 Pole Snap Action	2 Pole Snap Action	2 Pole Slow Make Slow Break	Double snap action	

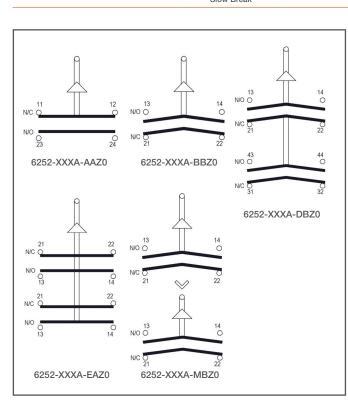

In all applications except where protective extra low voltage (PELV) circuits are being switched, an earth conductor must be installed. The earth conductor should be rated in accordance with the prevailing standards.

