

6256 Heavy Duty Footswitch Pole with ball handle

- Sturdy & durable industrial footswitch
- Unique functional design aesthetic
- Cover with pole and ball handle
- Optional guard for safety shoes
- Adaptable range of accessories
- Waterproof to IP67 (EN 60529)




General specifications


Standards/Approvals	CE
Degree of protection	EN60529 IPX2, optional IP67 with seal kit 6050-5500-0138 or adequate components
Connection method	Internal terminal block / cable with free wire ends. As standard, cable exit is from the rear
Electrical Rating	See ordering & options
Contact Configuration	See ordering & options
Operating temperature range	-20°C to +80°C

Material	Body: Injection Moulded ABS (High Impact) Pole: Stainless steel Ball: Nylon 50 mm Ø
Weight	Unguarded 1.6kg Guarded 1.9Kg
Life expectancy	1x10 ⁶ cycles
Additional information	3 x M20x1.5 conduit entry

Reference dimensions in mm

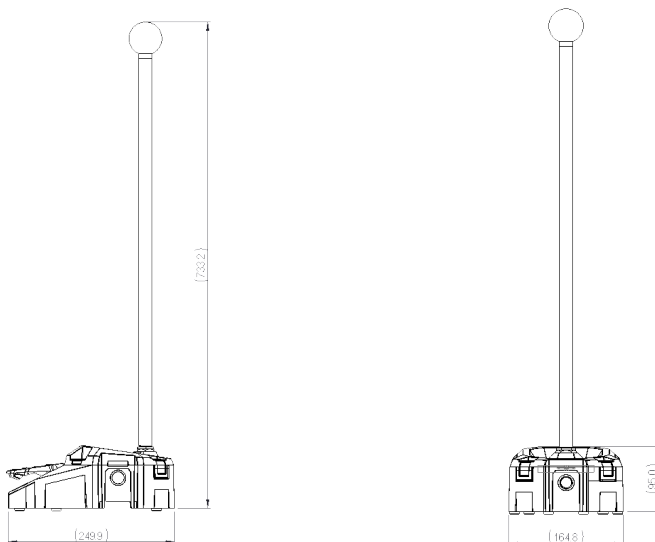

Code structure - please contact Herga Sales to discuss product availability before ordering



Model (UL)

Footswitch safety

- A Unguarded (UL)
- B Guarded (UL)

Electrical

- A Slow break & make; AC-15 6A 250V / DC-12 6A 24V (UL)
- B Snap break & make; AC-15 6A 250V / DC-12 6A 24V (UL)
- C 5k Ohm potentiometer + snap action microswitches
(must use switching option "G")
- D 10k Ohm potentiometer + snap action microswitches
(must use switching option "G")
- F High power rating (25A 125/250V AC. 1HP 125/250V AC)
(must use switching option "H")

Switching operation

- A 1 NO + 1 NC (UL)
- B 2 NO + 2 NC
- C 2 NO + 2 NC - staggered
- D 2x (1 NO + 1 NC)
- E 4x (1 NO + 1 NC)
- F 4x (1 NO + 1 NC) - staggered
- G Potentiometer - double pole change over contacts
(must use "Electrical option - C/D")
- H Double pole change over contacts, 2 switches, high power
(must use "Electrical option - F")

Cable options

- Z no cable (* cable kits under accessories) (UL)

Bluetooth

- Z No Bluetooth (UL)
- A Bluetooth BLE2 - on request

Cover

- A Pole with ball handle
(recommended to use with base plate if stand alone - see accessories)

Pedal

- Z No option - standard pedal (UL)
- (A Pedal lock¹)

Release

- Z No manual release or DA Button (UL)
- (A Manual release¹)
- (B DA Button¹)
- (C Manual release and DA Button¹)

¹ planned option, will be available soon



with 6050-5500-0154 Base Plate
(order details see "Accessories")



with 6050-5500-0154 Base Plate
and Guard
(order details see "Accessories")

